Research article
Open Access
CrossMark

An electromagnetoelastic engine for nano and micro bionics

Abstract

The structural model and scheme of an electromagnetoelastic engine are determined for nano and micro bionics. The structural scheme of an electromagnetoelastic engine is constructed. The matrix equation is obtained for an electromagnetoelastic engine.

Keywords: electromagnetoelastic engine, structural scheme, piezo engine, nano and micro bionics

Volume 10 Issue 1 - 2026

Afonin SM
National Research University of Electronic Technology, Russia

Correspondence: Afonin Sergey Mikhailovich, National Research University of Electronic Technology, MIET, 124498, Moscow, Russia

Received: June 17, 2026 | **Published:** July 27, 2026

Introduction

An electromagnetoelastic engine is used for the nano alignment in adaptive optics, in tunnel microscopy and interferometers in nanomedicine and applied bionics, in the ring quantum generators, in the dampen mechanical vibrations, in the penetration in a cells and the genes.[1–15] For construction structural model of an electromagnetoelastic engine the methods mathematical physics are applied. In an electromagnetoelastic engines as active elements are used piezo or magnetostricton engenes. In difference from Cady and Mason equivalent electric schemes[8–10] for calculations the deformations an electromagnetoelastic engine its structural scheme and its transfer functions are applied.[14–23]

Structural model and scheme

Methods mathematical physics with decision the equation of the reverse electromagnetoelastic effect and the differential equation of an electromagnetoelastic engine at boundary conditions are used for calculation structural model of an engine and its structural scheme. An engine works on basis of the reverse electromagnetoelastic effect in the form[3–59]

$$S_i = s_{ij}^{\Psi} T_j + \nu_{mi} \Psi_m$$

where S_i, $\Psi_m = E_m, D_m, H_m$, T_j, s_{ij}^{Ψ}, $\nu_{mi} = d_{mi}, g_{mi}, d_{mi}$ are the relative deformation, control parameter in the form strength electric field, induction and strength magnetic field, strength mechanical field, elastic compliance at $\Psi = \text{const}$, the electromagnetoelastic module in the form piezo module, piezo const and magnitostriction const, i, j, m are indexes.

The differential equation[3–59] of an electromagnetoelastic engine has form

$$\frac{d^2\Xi(x,s)}{dx^2} - \gamma^2 \Xi(x,s) = 0$$

$$\gamma = s/c^{\Psi} + \alpha$$

here $\Xi(x,s)$, s, x, γ, c^{Ψ}, α are the Laplace transform of the deformation, the parameter transform, the coordinate, the propagation factor, the speed of sound at $\Psi = \text{const}$, coefficient wave attenuation.

For an electromagnetoelastic engine we have its decision at $x = 0$ the trasform first deformation $\Xi(0,s) = \Xi_1(s)$ and at $x = l$ the trasform second deformation $\Xi(l,s) = \Xi_2(s)$.

The decision this differential equation has the form

$$\Xi(x,s) = \left\{\Xi_1(s)\,\mathrm{sh}\left[(l-x)\gamma\right] + \Xi_2(s)\,\mathrm{sh}(x\gamma)\right\} / \mathrm{sh}(l\gamma)$$

where $\Xi_1(s)$, $\Xi_2(s)$ are the transforms of the deformations.

Then we have the system strength mechanical field for two faces an electromagnitoelastic engine in the form

$$T_j(0,s) = \frac{1}{s_{ij}^{\Psi}} \frac{d\Xi(x,s)}{dx}\bigg|_{x=0} - \frac{\nu_{mi}}{s_{ij}^{\Psi}} \Psi_m(s)$$

$$T_j(l,s) = \frac{1}{s_{ij}^{\Psi}} \frac{d\Xi(x,s)}{dx}\bigg|_{x=l} - \frac{\nu_{mi}}{s_{ij}^{\Psi}} \Psi_m(s)$$

where l the length of an electromagnitoelastic engine.

The general structural model and structural scheme on Figure 1 of an electromagnitoelastic engine are determined

$$\Xi_1(s) = \left(M_1 s^2\right)^{-1} \left\{ \begin{array}{l} -F_1(s) + \left(\chi_{ij}^{\Psi}\right)^{-1} \\ \times \left[\nu_{mi} \Psi_m(s) - \left[\gamma / \mathrm{sh}(l\gamma)\right]\right] \\ \times \left[\mathrm{ch}(l\gamma)\Xi_1(s) - \Xi_2(s)\right] \end{array} \right\}$$

$$\Xi_2(s) = \left(M_2 s^2\right)^{-1} \left\{ \begin{array}{l} -F_2(s) + \left(\chi_{ij}^{\Psi}\right)^{-1} \\ \times \left[\nu_{mi} \Psi_m(s) - \left[\gamma / \mathrm{sh}(l\gamma)\right]\right] \\ \times \left[\mathrm{ch}(l\gamma)\Xi_2(s) - \Xi_1(s)\right] \end{array} \right\}$$

$$\chi_{ij}^{\Psi} = s_{ij}^{\Psi} / S_0$$

where

$$\Psi_m = \begin{cases} E_3, E_3, E_1 \\ D_3, D_3, D_1 \\ H_3, H_3, H_1 \end{cases}$$

$$\nu_{mi} = \begin{cases} d_{33}, d_{31}, d_{15} \\ g_{33}, g_{31}, g_{15} \\ d_{33}, d_{31}, d_{15} \end{cases}$$

$$s_{ij}^{\Psi} = \begin{cases} s_{33}^{E}, s_{11}^{E}, s_{55}^{E} \\ s_{33}^{D}, s_{11}^{D}, s_{55}^{D} \\ s_{33}^{H}, s_{11}^{H}, s_{55}^{H} \end{cases}$$

©2026 Afonin. This is an open access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and build upon your work non-commercially.

Copyright: ©2026 Afonin.

The structural model and the structural scheme of an electromagnetoelastic engine on Figure 1 are used for the design of a precise control system for nano and micro bionics.

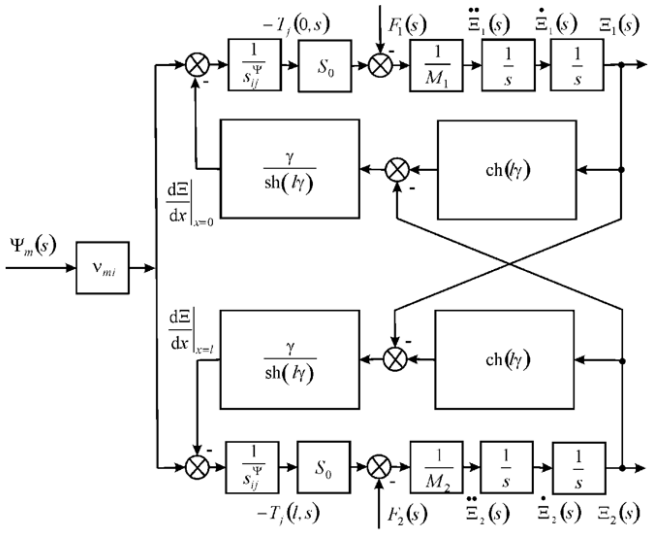

Figure 1 Structural scheme an electromagnetoelastic engine.

The matrix of the deformations is written

$$\begin{pmatrix}\Xi_1(s)\\ \Xi_2(s)\end{pmatrix}=\begin{pmatrix}W_{11}(s) & W_{12}(s) & W_{13}(s)\\ W_{21}(s) & W_{22}(s) & W_{23}(s)\end{pmatrix}\begin{pmatrix}\Psi_m(s)\\ F_1(s)\\ F_2(s)\end{pmatrix}$$

where

$$W_{11}(s)=\frac{\Xi_1(s)}{\Psi_m(s)}=-\frac{\nu_{mi}}{A_{ij}}\left[M_2\chi_{ij}^{\Psi}s^2+\gamma\mathrm{th}\left(\frac{l\gamma}{2}\right)\right]$$

$$W_{21}(s)=\frac{\Xi_2(s)}{\Psi_m(s)}=\frac{\nu_{mi}}{A_{ij}}\left[M_1\chi_{ij}^{\Psi}s^2+\gamma\mathrm{th}\left(\frac{l\gamma}{2}\right)\right]$$

$$W_{12}(s)=\frac{\Xi_1(s)}{F_1(s)}=-\frac{\chi_{ij}^{\Psi}}{A_{ij}}\left[M_2\chi_{ij}^{\Psi}s^2+\frac{\gamma}{\mathrm{th}(l\gamma)}\right]$$

$$W_{13}(s)=\frac{\Xi_1(s)}{F_2(s)}=W_{22}(s)=\frac{\xi_2(s)}{F_1(s)}=\frac{\chi_{ij}^{\Psi}\gamma}{A_{ij}\mathrm{sh}(l\gamma)}$$

$$W_{23}(s)=\frac{\Xi_2(s)}{F_2(s)}=-\frac{\chi_{ij}^{\Psi}}{A_{ij}}\left[M_1\chi_{ij}^{\Psi}s^2+\frac{\gamma}{\mathrm{th}(l\gamma)}\right]$$

$$A_{ij}=M_1M_2\left(\chi_{ij}^{\Psi}\right)^2s^4+\frac{\left(M_1+M_2\right)\chi_{ij}^{\Psi}}{\mathrm{c}^{\Psi}\mathrm{th}(l\gamma)}s^3+$$

$$+\left[\frac{\left(M_1+M_2\right)\chi_{ij}^{\Psi}\alpha}{\mathrm{th}(l\gamma)}+\frac{1}{\left(c^{\Psi}\right)^2}\right]s^2+\frac{2\alpha}{c^{\Psi}}s+\alpha^2$$

The structural model and the structural scheme of an electromagnetoelastic engine are constructed at two mass load. In general the matrix of the deformations of an electromagnetoelastic engine are obtained for the constructions of the engine at two mass load in the step engine.

For $\Psi_m(t)=\Psi_{m0}\cdot 1(t)$, $F_1(t)=F_2(t)=0$ at inertial load the static displacement the faces of an electromagnetoelastic engine $\xi_1(\infty)$ and $\xi_2(\infty)$ we have the form

$$\xi_1(\infty)=\lim_{t\to\infty}\xi_1(t)=\frac{\nu_{mi}l\Psi_{m0}\left(M_2+m/2\right)}{M_1+M_2+m}$$

$$\xi_2(\infty)=\lim_{t\to\infty}\xi_2(t)=\frac{\nu_{mi}l\Psi_{m0}\left(M_1+m/2\right)}{M_1+M_2+m}$$

$$\xi_1(\infty)+\xi_2(\infty)=\lim_{t\to\infty}\left(\xi_1(t)+\xi_2(t)\right)=\nu_{mi}l\Psi_{m0}$$

where m is the mass of the electrmagnetoelastic engine, M_1, M_2 are the load masses.

For the static displacements of the longitudinal piezo engine for $m<<M_1$ and $m<<M_2$ we have equations in the form

$$\xi_1(\infty)=\frac{d_{33}U_0M_2}{M_1+M_2}$$

$$\hat{\imath}_2(\infty)=\frac{d_{33}U_0M_1}{M_1+M_2}$$

where δ is the thickness of the piezo engine. For the PZT longitudinal piezo engine d_{33} = 4·10^{-10} m/V, U = 100 V, M_1 = 1 kg, M_2 = 4 kg we have the module of displacements the faces ξ_1 = 32 nm, ξ_2 = 8 nm and summa module of displacements $\xi_1+\xi_2$ = 40 nm at error 10%.

For the static displacements of the transverse piezo engine for $m<<M_1$ and $m<<M_2$ we have equations in the form

$$\xi_1(\infty)=\frac{d_{31}(l/\delta)U_0M_2}{M_1+M_2}$$

$$\xi_2(\infty)=\frac{d_{31}(l/\delta)U_0M_1}{M_1+M_2}$$

For the PZT transverse piezo engine d_{31} = 2.5·10^{-10} m/V, l/δ = 20, U = 100 V, M_1 = 1 kg, M_2 = 4 kg we have the module of displacements the faces ξ_1 = 400 nm, ξ_2 = 100 nm and summa modules of displacements $\xi_1+\xi_2$ = 500 nm at error 10%.

For $M_1\to\infty$, $m<<M_2$ and the control voltage for the resistance $R=0$ the transfer function on voltage for the transverse piezo engine is obtained in the form

$$W_U(s)=\frac{\Xi_2(s)}{U(s)}=\frac{d_{31}(l/\delta)}{\left(1+C_l/C_{11}^E\right)\left(T_t^2s^2+2T_t\xi_ts+1\right)}$$

$$T_t=\sqrt{M_2/\left(C_l+C_{11}^E\right)}$$

where $U(s)$ is the Laplace transform of the voltage, T_t is the timwhere $U(s)$ is the Laplace transform of the voltage, T_t is the time constant, ξ_t is the damping coefficient of the transverse piezo engine, C_l is the load rigidity, C_{11}^E is the transverse piezo engine rigidity at $E=\mathrm{const}$.

Then the transfer function on voltage for $M_1\to\infty$, $m<<M_2$ for the transverse piezo engine at one the fixed face the transfer expression is obtained

$$W_U(s)=\frac{\Xi_2(s)}{U(s)}=\frac{k_{31}^U}{T_t^2s^2+2T_t\xi_ts+1}$$

$$k_{31}^U=d_{31}(l/\delta)/\left(1+C_l/C_{11}^E\right)$$

$$T_t=\sqrt{M_2/\left(C_l+C_{11}^E\right)}$$

For M_2 = 4 kg, C_l = 0.2·10^7 N/m, C_{11}^E = 1.4·10^7 N/m we have T_t = 0.5·10^{-3} s, $\omega_t=1/T_t$ = 2·10^3 s^{-1} at error 10%.

Citation: Afonin SM. An electromagnetoelastic engine for nano and micro bionics. *MOJ App Bio Biomech.* 2026;10(1):82–85.
DOI: 10.15406/mojabb.2026.10.00245

The static transverse deformation has the form

$$\xi_2(\infty) = \frac{d_{31}(l/\delta)U}{1 + C_l/C_{11}^E} = k_{31}^U U$$

For $d_{31} = 2.5\text{X}10^{-10}$ m/V, $l/\delta = 20$, $C_l/C_{11}^E = 0.14$ the coefficient is determined $k_{31}^U = 4.4$ nm/V at error 10%.

The parameters of the piezo engine with one the its fixed face are determined for nano and micro bionics. The parameters PZT transverse engine are found.

Conclusions

The general structural model and the structural scheme of an electromagnetoelastic engine are constructed at two mass load.

The matrix of the deformations of an electromagnetoelastic engine are obtained for the constructions of the engine at two mass load in the step engine.

The parameters of the piezo engine with one its fixed face are determined for nano and micro bionics.

Acknowledgments

None.

Funding

None.

Conflicts of interest

The author declares that there is no conflict of interest.

References

1. Zhou X, Wu S, Wang X, et al. Review on piezoelectric actuators: materials, classifications, applications, and recent trends. *Front Mech Eng*. 2024;19(1):6.
2. Afonin SM. Absolute stability conditions for a system controlling the deformation of an elecromagnetoelastic transduser. *Dokl Math*. 2006;74(3):943–948.
3. Uchino K. *Piezoelectric actuator and ultrasonic motors*. Boston, MA: Kluwer Academic Publisher. 1997;8:350.
4. Afonin SM. Generalized parametric structural model of a compound elecromagnetoelastic transduser. *Doklady Physics*. 2005;50(2):77–82.
5. Afonin SM. Structural parametric model of a piezoelectric nanodisplacement transducer. *Doklady Physics*. 2008;53(3):137–143.
6. Afonin SM. Solution of the wave equation for the control of an elecromagnetoelastic transduser. *Dokl Math*. 2006;73(2):307–313.
7. Afonin SM. Erratum to: Solution of the wave equation for the control of an elecromagnetoelastic transduser. *Dokl Math*. 2025;111:91.
8. Cady WG. *Piezoelectricity: An introduction to the theory and applications of electromechancial phenomena in crystals*. McGraw-Hill Book Company, New York, London, 1946;806.
9. Mason W, editor. *Physical acoustics: Principles and methods*. Vol. 1. Part A. Methods and devices. Academic Press, New York, 1964;515.
10. Yang Y, Tang L. Equivalent circuit modeling of piezoelectric energy harvesters. *J Intell Mater Syst Struct*. 2009;20(18):2223–2235.
11. Zwillinger D. *Handbook of differential equations*. Academic Press, Boston, 1989;673.
12. Afonin SM. A generalized structural-parametric model of an elecromagnetoelastic converter for nano- and micrometric movement control systems: III. Transformation parametric structural circuits of an elecromagnetoelastic converter for nano- and micrometric movement control systems. *J Comput Syst Sci Int*. 2006;45(2):317–325.
13. Afonin SM. Generalized structural-parametric model of an electromagnetoelastic converter for control systems of nano- and micrometric movements: IV. Investigation and calculation of characteristics of step-piezodrive of nano-and micrometric movements. *J Comput Syst Sci Int*. 2006;45(6):1006–1013.
14. Afonin SM. Decision wave equation and block diagram of electromagnetoelastic actuator nano- and microdisplacement for communications systems. *Int J Inf Commun Sci*. 2016;1(2):22–29.
15. Afonin SM. *Structural-parametric model and transfer functions of electroelastic actuator for nano- and microdisplacement*. Chapter 9 in Piezoelectrics and Nanomaterials: Fundamentals, Developments and Applications. Editors: Parinov IA. Nova Science, New York. 2015;225–242.
16. Afonin SM. *A structural-parametric model of electroelastic actuator for nano- and microdisplacement of mechatronic system*. Chapter 8 in Advances in Nanotechnology. Volume 19. Editors: Bartul Z, Trenor J, Nova Science, New York. 2017;259–284.
17. Afonin SM. Electromagnetoelastic nano- and microactuators for mechatronic systems. *Russ Engin Res*. 2018;38(12):938–944.
18. Afonin SM. Nano- and micro-scale piezomotors. *Russ Engin Res*. 2012;32(7–8):519–522.
19. Afonin SM. Elastic compliances and mechanical and adjusting characteristics of composite piezoelectric transducers. *Mech Solids*. 2007;42(1):43–49.
20. Afonin SM. Stability of strain control systems of nano-and microdisplacement piezotransducers. *Mech Solids*. 2014;49(2):196–207.
21. Afonin SM. Structural-parametric model electromagnetoelastic actuator nanodisplacement for mechatronics. *Int J Phys*. 2017;5(1):9–15.
22. Afonin SM. Structural-parametric model multilayer electromagnetoelastic actuator for nanomechatronics. *Int J Phys*. 2019;7(2):50–57.
23. Afonin SM. Calculation deformation of an engine for nano biomedical research. *Int J Biomed Res*. 2021;1(5):1–4.
24. Afonin SM. Precision engine for nanobiomedical research. *Biomed Res Clin Rev*. 2021;3(4):1–5.
25. Afonin SM. Solution wave equation and parametric structural schematic diagrams of electromagnetoelastic actuators nano- and microdisplacement. *Int J Math Anal Appl*. 2016;3(4):31–38.
26. Afonin SM. Structural-parametric model of electromagnetoelastic actuator for nanomechanics. *Actuators*. 2018;7(1):6.
27. Afonin SM. Structural-parametric model and diagram of a multilayer electromagnetoelastic actuator for nanomechanics. *Actuators*. 2019;8(3):52.
28. Afonin SM. Structural-parametric models and transfer functions of electromagnetoelastic actuators nano- and microdisplacement for mechatronic systems. *Int J Theor Appl Math*. 2016;2(2):52–59.
29. Afonin SM. Design static and dynamic characteristics of a piezoelectric nanomicrotransducers. *Mech Solids*. 2010;45(1):123–132.
30. Afonin SM. Electromagnetoelastic actuator for nanomechanics. *GJRE*. 2018;18(2):19–23.
31. Afonin SM. *Multilayer electromagnetoelastic actuator for robotics systems of nanotechnology*. Proceedings of the 2018 IEEE Conference EIConRus. 2018;1698–1701.

32. Afonin SM. A block diagram of electromagnetoelastic actuator nanodisplacement for communications systems. *Trans Netw Commun.* 2018;6(3):1–9.

33. Afonin SM. Decision matrix equation and block diagram of multilayer electromagnetoelastic actuator micro and nanodisplacement for communications systems. *Trans Netw Commun*. 2019;7(3):11–21.

34. Afonin SM. Condition absolute stability control system of electromagnetoelastic actuator for communication equipment. *Trans Netw Commun*. 2020;8(1):8–15.

35. Afonin SM. A Block diagram of electromagnetoelastic actuator for control systems in nanoscience and nanotechnology. *Trans Mach Learn Artif Intell*. 2020;8(4):23–33.

36. Afonin SM. Optimal control of a multilayer electroelastic engine with a longitudinal piezoeffect for nanomechatronics systems. *Appl System Innov*. 2020;3(4):53.

37. Afonin SM. Coded control of a sectional electroelastic engine for nanomechatronics systems. *Appl Syst Innov*. 2021;4(3):47.

38. Afonin SM (2020) Structural scheme actuator for nano research. *COJ Rev Res*. 2020;2(5):1–3.

39. Afonin SM. Structural–parametric model electroelastic actuator nano- and microdisplacement of mechatronics systems for nanotechnology and ecology research. *MOJ Eco Environ Sci*. 2018;3(5):306–309.

40. Afonin SM. Electromagnetoelastic actuator for large telescopes. *Aeron Aero Open Access J*. 2018;2(5):270–272.

41. Afonin SM. Condition absolute stability of control system with electro elastic actuator for nano bioengineering and microsurgery. *SCSOAJ*. 2019;3(3):307–309.

42. Afonin SM. Piezo actuators for nanomedicine research. *MOJ App Bio Biomech*. 2019;3(2):56–57.

43. Afonin SM. Frequency criterion absolute stability of electromagnetoelastic system for nano and micro displacement in biomechanics. *MOJ App Bio Biomech*. 2019;3(6):137–140.

44. Afonin SM. Multilayer piezo engine for nanomedicine research. *MOJ App Bio Biomech*. 2020;4(2):30–31.

45. Afonin SM. Structural scheme of electromagnetoelastic actuator for nano biomechanics. *MOJ App Bio Biomech*. 2021;5(2):36–39.

46. Afonin SM. Multilayer engine for microsurgery and nano biomedicine. *SCSOAJ*. 2020;4(4):423–425.

47. Afonin SM. *A structural-parametric model of a multilayer electroelastic actuator for mechatronics and nanotechnology*. Chapter 7 in Advances in Nanotechnology. Volume 22. Editors: Bartul Z, Trenor J, Nova Science, New York. 2019;169–186.

48. Afonin SM. *Electroelastic digital-to-analog converter actuator nano and microdisplacement for nanotechnology*. Chapter 6 in Advances in Nanotechnology. Volume 24. Editors: Bartul Z, Trenor J, Nova Science, New York. 2020;205–218.

49. Afonin SM. *Characteristics of an electroelastic actuator nano- and microdisplacement for nanotechnology*. Chapter 8 in Advances in Nanotechnology. Volume 25. Editors: Bartul Z, Trenor J, Nova Science, New York. 2021;251–266.

50. Afonin SM. *An absolute stability of nanomechatronics system with electroelastic actuator*. Chapter 9 in Advances in Nanotechnology. Volume 27. Editors: Bartul Z, Trenor J, Nova Science, New York. 2022;183–198.

51. Afonin SM. Rigidity of a multilayer piezoelectric actuator for the nano and micro range. *Russ Engin Res*. 2021;41(4):285–288.

52. Afonin SM. DAC electro elastic engine for nanomedicine. *MOJ App Bio Biomech*. 2024;8(1):38–40.

53. Afonin SM. Calculation of structural scheme nano piezoengine with lumped parameters at voltage and current control for aerospace. *Aeron Aero Open Access J*. 2025;9(2):113–116.

54. Afonin SM. Structural scheme of electroelastic engine micro and nano displacement for applied bionics and biomechanics. *MOJ App Bio Biomech*. 2025;9(1):1–4.

55. Afonin SM. Multilayer and sectional nano piezo engine for applied bionics and biomechanics. *MOJ App Bio Biomech*. 2025;9(1):59–62.

56. Afonin SM. Step piezoengine for nano and micro bionics. *MOJ App Bio Biomech*. 2026;10(1):22–24.

57. Afonin SM. Calculation of parameters multilayer longitudinal piezoactuator for aerospace. *Aeron Aero Open Access J*. 2026;10(2):99–103.

58. Shevtsov SN, Soloviev AN, Parinov IA, et al. *Piezoelectric actuators and generators for energy harvesting*. Research and Development. Springer, Switzerland, Cham. 2018;182.

59. Nalwa HS, editor. *Encyclopedia of nanoscience and nanotechnology*. USA: American Scientific Publishers. 25 Volumes. 2019.

Citation: Afonin SM. An electromagnetoelastic engine for nano and micro bionics. *MOJ App Bio Biomech.* 2026;10(1):82–85.
DOI: 10.15406/mojabb.2026.10.00245