

Structural scheme of electroelastic engine micro and nano displacement for applied bionics and biomechanics

Abstract

The structural schemes of electroelastic engine micro and nano displacement are determined for applied bionics and biomechanics. The structural scheme of electroelastic engine is constructed by method mathematical physics. The displacement matrix of electroelastic engine micro and nano displacement is determined.

Keywords: electroelastic engine, structural scheme, micro and nano displacement, applied bionics

Volume 9 Issue 1 - 2025

Afonin S.M.

National Research University of Electronic Technology MIET, Russia

Correspondence: Afonin SM, National Research University of Electronic Technology MIET, Moscow, Russia, Email learner01@mail.ru

Received: December 24, 2024 | **Published:** January 7, 2025

Introduction

An electroelastic engines based on electroelasticity with piezoelectric and electrostriction effects are used for micro and nano displacement in applied bionics and biomechanics in adaptive optics, scanning microscopy, ring quantum generator, for the actively dampen mechanical vibrations, for penetration to a cells and for the works with a genes.¹⁻¹⁵ An electroelastic engine is applied in adaptive optics systems for phase corrections in an interferometer to adjust maximum of the interference image. In scanning probe microscopy, an image of a surface is formed using an electroelastic engine to scan an object. Scanning tunneling microscope is used to visualize surfaces at the atomic level. Nano displacements of the probe along three coordinates X, Y, Z are carried out using an electroelastic engine.¹⁴⁻⁵⁸

The equation of electroelastic effect³⁻⁴⁹ is written in the general form

$$S_i = v_{mi} \Psi_m + s_{ij}^{\Psi} T_j$$

here $\Psi_m = E_m, D_m$ is control parameter and $v_{mi} = d_{mi}, g_{mi}$ at the voltage or current control, $S_i, E_m, D_m, T_j, d_{mi}, g_{mi}, s_{ij}^{\Psi}$ are the relative displacement, the strength electric field, the electric induction, the strength mechanical field, the modules, and the elastic compliance at $\Psi = \text{const}$, the indexes i, j, m . The ordinary differential equation an electroelastic engine⁸⁻⁴⁹ has form

$$\frac{d^2 \Xi(x, s)}{dx^2} - \gamma^2 \Xi(x, s) = 0$$

here $\Xi(x, s), x, s, \gamma$ are the transform of the displacement, the coordinate, the parameter, the propagation coefficient and the general length $l = \{h, \delta, b$ an electroelastic engine. For an electroelastic engine at $x = 0, \Xi(0, s) = \Xi_1(s)$ and at $x = l, \Xi(l, s) = \Xi_2(s)$.

We have the solution this ordinary differential equation

$$\Xi(x, s) = \left\{ \Xi_1(s) \text{sh}[(l-x)\gamma] + \Xi_2(s) \text{sh}(x\gamma) \right\} / \text{sh}(l\gamma)$$

here $\Xi_1(s), \Xi_2(s)$ are the transforms displacements of its two ends.

For the boundary conditions its system has the form

$$T_j(0, s) = \frac{1}{s_{ij}^{\Psi}} \frac{d\Xi(x, s)}{dx} \Big|_{x=0} - \frac{v_{mi}}{s_{ij}^{\Psi}} \Psi_m(s)$$

$$T_j(l, s) = \frac{1}{s_{ij}^{\Psi}} \frac{d\Xi(x, s)}{dx} \Big|_{x=l} - \frac{v_{mi}}{s_{ij}^{\Psi}} \Psi_m(s)$$

The transform of the force causes displacement is obtained

$$F(s) = \frac{v_{mi} \Psi_m(s)}{\chi_{ij}^{\Psi}}$$

$$\chi_{ij}^{\Psi} = s_{ij}^{\Psi} / S_0$$

The general structural scheme of electroelastic engine on Figure 1 and its model are determined at voltage or current control for longitudinal, transverse and shift displacements

$$\Xi_1(s) = (M_1 s^2)^{-1} \left\{ \begin{array}{l} -F_1(s) + (\chi_{ij}^{\Psi})^{-1} \\ \times \left[v_{mi} \Psi_m(s) - [\gamma / \text{sh}(l\gamma)] \right] \\ \times \left[\text{ch}(l\gamma) \Xi_1(s) - \Xi_2(s) \right] \end{array} \right\}$$

$$\Xi_2(s) = (M_2 s^2)^{-1} \left\{ \begin{array}{l} -F_2(s) + (\chi_{ij}^{\Psi})^{-1} \\ \times \left[v_{mi} \Psi_m(s) - [\gamma / \text{sh}(l\gamma)] \right] \\ \times \left[\text{ch}(l\gamma) \Xi_2(s) - \Xi_1(s) \right] \end{array} \right\}$$


$$\text{here } v_{mi} = \begin{Bmatrix} d_{33}, d_{31}, d_{15} \\ g_{33}, g_{31}, g_{15} \end{Bmatrix}, \Psi_m = \begin{Bmatrix} E_3, E_3, E_1 \\ D_3, D_3, D_1 \end{Bmatrix}$$

$$s_{ij}^{\Psi} = \begin{Bmatrix} s_{33}^E, s_{11}^E, s_{55}^E \\ s_{33}^D, s_{11}^D, s_{55}^D \end{Bmatrix}, \gamma = \{ \gamma^E, \gamma^D \}, c^{\Psi} = \{ c^E, c^D \}$$

The general structural scheme of electroelastic engine micro and nano displacement on Figure 1 are used for applied bionics and biomechanics

The displacement matrix has the form

Figure 1 General structural scheme electroelastic engine.

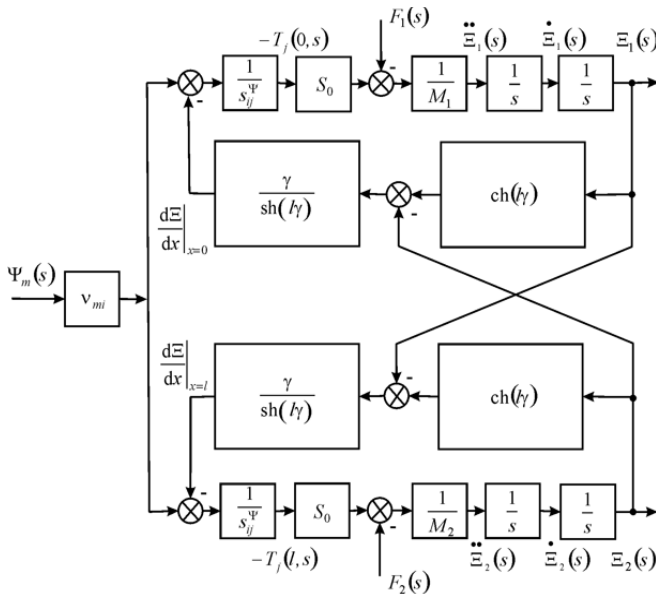

$$U_d(s) = k_d R \dot{\Xi}_n(s), \quad n = 1, 2$$

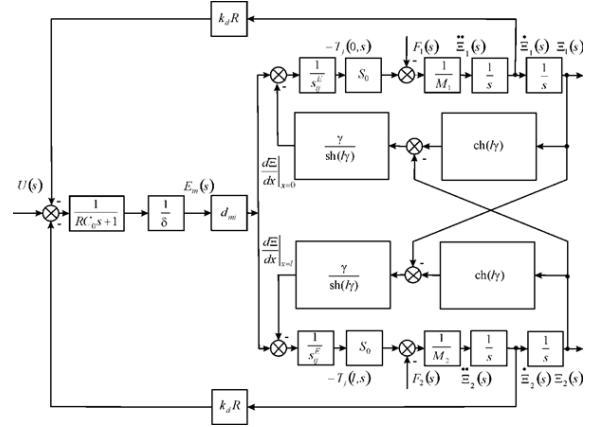


Figure 2 Structural scheme piezoengine.

The structural scheme of piezoengine on Figure 3 is obtained at voltage control of piezoengine with elastic inertial load and first fixed end.

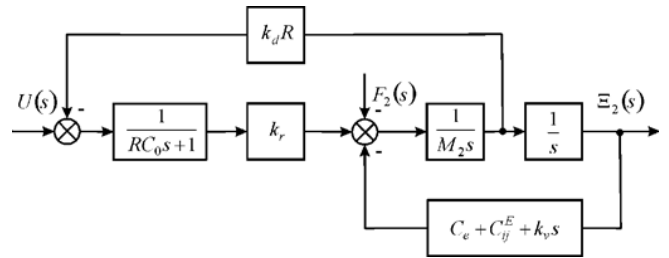


Figure 3 Structural scheme piezoengine with elastic inertial load.

At voltage control of piezoengine with elastic inertial load and fixed first end on Figure 3 is determined

$$W(s) = \Xi_2(s)/U(s) = k_r / (a_3 p^3 + a_2 p^2 + a_1 p + a_0)$$

$$a_3 = RC_0 M_2, \quad a_2 = M_2 + RC_0 k_r$$

$$a_1 = k_v + RC_0 C_{ij} + RC_0 C_e + R k_r^2, \quad a_0 = C_e + C_{ij}$$

$$k_r = k_d = d_{mi} S_0 / (\delta S_{ij}^E)$$

here k_r - the reverse coefficient of piezoengine at voltage control.

At $R = 0$ the transfer function of PZT engine is founded

$$W(s) = \frac{\Xi(s)}{U(s)} = \frac{k_{31}^U}{T_t^2 s^2 + 2T_t \xi_t s + 1}$$

$$k_{31}^U = d_{31} (h/\delta) / (1 + C_e/C_{11}^E)$$

$$T_t = \sqrt{M_2 / (C_e + C_{11}^E)}, \quad \omega_t = 1/T_t$$

At PZT engine $M_2 = 0.25 \text{ kg}$, $C_e = 0.2 \times 10^7 \text{ N/m}$, $C_{11}^E = 1.4 \times 10^7 \text{ N/m}$ its time constant is obtained $T_t = 0.125 \times 10^{-3} \text{ s}$ with 10% error. At $d_{31} = 0.2 \text{ nm/V}$, $h/\delta = 20$, $C_e/C_{11}^E = 0.14$ its transfer coefficient is determined $k_{31}^U = 3.5 \text{ nm/V}$ with 10% error.

$$\begin{pmatrix} \Xi_1(s) \\ \Xi_2(s) \end{pmatrix} = (W(s)) \begin{pmatrix} \Psi_m(s) \\ F_1(s) \\ F_2(s) \end{pmatrix}$$

$$(W(s)) = \begin{pmatrix} W_{11}(s) & W_{12}(s) & W_{13}(s) \\ W_{21}(s) & W_{22}(s) & W_{23}(s) \end{pmatrix}$$

here the transfer functions

$$W_{11}(s) = \Xi_1(s)/\Psi_m(s) = v_{mi} [M_2 \chi_{ij}^\Psi s^2 + \gamma \text{th}(l\gamma/2)] / A_{ij}$$

$$A_{ij} = M_1 M_2 (\chi_{ij}^\Psi)^2 s^4 + \{(M_1 + M_2) \chi_{ij}^\Psi / [c^\Psi \text{th}(l\gamma)]\} s^3 + [(M_1 + M_2) \chi_{ij}^\Psi \alpha / \text{th}(l\gamma) + 1 / (c^\Psi)^2] s^2 + 2\alpha s / c^\Psi + \alpha^2$$

$$W_{21}(s) = \Xi_2(s)/\Psi_m(s) = v_{mi} [M_1 \chi_{ij}^\Psi s^2 + \gamma \text{th}(l\gamma/2)] / A_{ij}$$

$$W_{12}(s) = \Xi_1(s)/F_1(s) = -\chi_{ij}^\Psi [M_2 \chi_{ij}^\Psi s^2 + \gamma / \text{th}(l\gamma)] / A_{ij}$$

$$W_{13}(s) = \Xi_1(s)/F_2(s) = W_{22}(s) = \Xi_2(s)/F_1(s) = [\chi_{ij}^\Psi \gamma / \text{sh}(l\gamma)] / A_{ij}$$

$$W_{23}(s) = \Xi_2(s)/F_2(s) = -\chi_{ij}^\Psi [M_1 \chi_{ij}^\Psi s^2 + \gamma / \text{th}(l\gamma)] / A_{ij}$$

At voltage control we have the equation of the direct piezoeffect in the form⁸⁻⁴¹

$$D_m = d_{mi} T_i + \varepsilon_{mk}^E E_k$$

here k is the index, ε_{mk}^E is the permittivity. The direct coefficient of piezoengine at voltage control has the form

$$k_d = d_{mi} S_0 / (\delta S_{ij}^E)$$

At voltage control on Figure 2 the transform of the voltage for two feedbacks is obtained in the form

Discussion

An electroelastic engine micro and nano displacement is used for applied bionics and biomechanics in system of adaptive optics and scanning microscopy. The structural scheme of electroelastic engine for micro and nano displacement is determined by method mathematical physics. For an electroelastic engine its displacement matrix is constructed. The schemes piezoengines at the voltage control are obtained with the feedbacks. The structural scheme of piezoengine for applied bionics and biomechanics are constructed from equations of piezoeffects for the longitudinal, transverse and shift displacements and decision the ordinary differential equation piezoengine.

We have the general structural scheme, the transfer functions in matrix form of electroelastic engine micro and nano displacement from the solution this ordinary differential equation and the equation of electroelastic effect. The piezoengine at the transverse piezoeffect has greater range its displacement then the piezoengine at the longitudinal piezoeffect.

Conclusion

The general electroelastic engine micro and nano displacement are obtained for applied bionics and biomechanics. The systems of equations are determined for the structural model of electroelastic engine for applied bionics and biomechanics. The structural scheme of electroelastic engine and its transfer functions in matrix form are determined. The displacement matrix of electroelastic engine is obtained. At voltage control of piezoengine with elastic inertial load and fixed first end the structural scheme is determined with feedbacks. The structural scheme of PZT engine is determined. The structural model and scheme of electroelastic engine for micro and nano displacement are constructed. The matrix of the deformations of electroelastic engine is obtained. The parameters of PZT engine are determined at voltage control with elastic inertial load and fixed first end for applied bionics and biomechanics.

Acknowledgments

None.

Funding

None.

Conflicts of interest

The author declares that there is no conflict of interest.

References

- Schultz J, Ueda J, Asada H. *Cellular actuators*. Butterworth-Heinemann Publisher, Oxford. 2017;382.
- Afonin SM. Absolute stability conditions for a system controlling the deformation of an electromagnetoelastic transducer. *Dokl Math*. 2006;74(3):943–948.
- Uchino K. *Piezoelectric actuator and ultrasonic motors*. Boston, MA: Kluwer Academic Publisher. 1997;350.
- Afonin SM. Generalized parametric structural model of a compound electromagnetoelastic transducer. *Dokl Phys*. 2005;50(2):77–82.
- Afonin SM. Structural parametric model of a piezoelectric nanodisplacement transducer. *Dokl Phys*. 2008;53(3):137–143.
- Afonin SM. Solution of the wave equation for the control of an electromagnetoelastic transducer. *Dokl Math*. 2006;73(2):307–313.
- Cady WG. *Piezoelectricity: An introduction to the theory and applications of electromechanical phenomena in crystals*. McGraw-Hill Book Company, New York, London. 1946;806.
- Mason W. *Physical Acoustics: Principles and methods*. Vol. 1. Part A. Methods and Devices. Academic Press, New York. 1964:515p.
- Zhao C, Li Z, Xu F, et al. Design of a novel three-degree-of-freedom piezoelectric-driven micro-positioning platform with compact structure. *Actuators*. 2024;13(7):248.
- Zwillinger D. *Handbook of differential equations*. Academic Press, Boston, 1989;673.
- Afonin SM. A generalized structural-parametric model of an electromagnetoelastic converter for nano- and micrometric movement control systems: III. Transformation parametric structural circuits of an electromagnetoelastic converter for nano- and micrometric movement control systems. *J Comput Sys Sci Int*. 2006;45(6):317–325.
- Afonin SM. Generalized structural-parametric model of an electromagnetoelastic converter for control systems of nano-and micrometric movements: IV. Investigation and calculation of characteristics of step-piezodrive of nano-and micrometric movements. *J Comput Syst Sci Int*. 2006;45(6):1006–1013.
- Afonin SM. Decision wave equation and block diagram of electromagnetoelastic actuator nano- and microdisplacement for communications systems. *Int J Info Comm Sci*. 2016;1(2):22–29.
- Afonin SM. *Structural-parametric model and transfer functions of electroelastic actuator for nano- and microdisplacement*. Chapter 9 in *Piezoelectrics and Nanomaterials: Fundamentals, Developments and Applications*. Ed. Parinov IA. Nova Science, New York. 2015;225–242.
- Afonin SM. *A structural-parametric model of electroelastic actuator for nano- and microdisplacement of mechatronic system*. Chapter 8 in *Advances in Nanotechnology*. Volume 19. Eds. Bartul Z, Trenor J, Nova Science, New York, 2017;259–284.
- Afonin SM. Electromagnetoelastic nano- and microactuators for mechatronic systems. *Russ Engin Res*. 2018;38(12):938–944.
- Afonin SM. Nano- and micro-scale piezomotors. *Russ Engin Res*. 2012;32(7–8):519–522.
- Afonin SM. Elastic compliances and mechanical and adjusting characteristics of composite piezoelectric transducers. *Mech Solids*. 2007;42(1):43–49.
- Afonin SM. Stability of strain control systems of nano-and microdisplacement piezotransducers. *Mech Solids*. 2014;49(2):196–207.
- Afonin SM. Structural-parametric model electromagnetoelastic actuator nanodisplacement for mechatronics. *Int J Phys*. 2017;5(1):9–15.
- Afonin SM. Structural-parametric model multilayer electromagnetoelastic actuator for nanomechanics. *Int J Phys*. 2019;7(2):50–57.
- Afonin SM. Calculation deformation of an engine for nano biomedical research. *Int J Biomed Res*. 2021;1(5):1–4.
- Afonin SM. Precision engine for nanobiomedical research. *Biomed Res Clinic Rev*. 2021;3(4):1–5.
- Afonin SM. Solution wave equation and parametric structural schematic diagrams of electromagnetoelastic actuators nano- and microdisplacement. *Int J Math Anal Appl*. 2016;3(4):31–38.
- Afonin SM. Structural-parametric model of electromagnetoelastic actuator for nanomechanics. *Actuators*. 2018;7(1):6.
- Afonin SM. Structural-parametric model and diagram of a multilayer electromagnetoelastic actuator for nanomechanics. *Actuators*. 2019;8(3):52.
- Afonin SM. Structural-parametric models and transfer functions of electromagnetoelastic actuators nano- and microdisplacement for mechatronic systems. *Int J Theor Appl Math*. 2016;2(2):52–59.

28. Afonin SM. Design static and dynamic characteristics of a piezoelectric nanomicrotransducers. *Mech Solids*. 2010;45(1):123–132.
29. Afonin SM. Electromagnetoelastic actuator for nanomechanics. *Global J Res Engin: A Mech Mechanics Engin*. 2018;18(2):19–23.
30. Afonin SM. Multilayer electromagnetoelastic actuator for robotics systems of nanotechnology. Proceedings of the 2018 IEEE Conference EIConRus. 2018;1698–1701.
31. Afonin SM. A block diagram of electromagnetoelastic actuator nanodisplacement for communications systems. *Trans Netw Comm*. 2018;6(3):1–9.
32. Afonin SM. Decision matrix equation and block diagram of multilayer electromagnetoelastic actuator micro and nanodisplacement for communications systems. *Trans Netw Comm*. 2019;7(3):11–21.
33. Afonin SM. Condition absolute stability control system of electromagnetoelastic actuator for communication equipment. *Trans Netw Comm*. 2020;8(1):8–15.
34. Afonin SM. A Block diagram of electromagnetoelastic actuator for control systems in nanoscience and nanotechnology. *Trans Machine Learn Artif Intel*. 2020;8(4):23–33.
35. Afonin SM. Optimal control of a multilayer electroelastic engine with a longitudinal piezoeffect for nanomechatronics systems. *Appl Sys Innov*. 2020;3(4):53.
36. Afonin SM. Coded control of a sectional electroelastic engine for nanomechatronics systems. *Appl Sys Innov*. 2021;4(3):47.
37. Afonin SM. Structural scheme actuator for nano research. *COJ Rev Res*. 2020;2(5):1–3.
38. Afonin SM. Structural–parametric model electroelastic actuator nano and microdisplacement of mechatronics systems for nanotechnology and ecology research. *MOJ Eco Environ Sci*. 2018;3(5):306–309.
39. Afonin SM. Deformation of electromagnetoelastic actuator for nano robotics system. *Int Rob Auto J*. 2020;6(2):84–86.
40. Afonin SM. Correction of characteristics compound longitudinal piezo-drive at elastic inertial load for nanorobotics research. *Int Rob Auto J*. 2024;10(3):103–106.
41. Afonin SM. A multi-layer electro elastic drive for micro and nano robotics. *Int Rob Auto J*. 2024;10(2):73–76.
42. Afonin SM. Electromagnetoelastic actuator for large telescopes. *Aeron Aero Open Access J*. 2018;2(5):270–272.
43. Afonin SM. Condition absolute stability of control system with electro elastic actuator for nano bioengineering and microsurgery. *Surg Case Stud Open Access J*. 2019;3(3):307–309.
44. Afonin SM. Piezo actuators for nanomedicine research. *MOJ App Bio Biomech*. 2019;3(2):56–57.
45. Afonin SM. Frequency criterion absolute stability of electromagnetoelastic system for nano and micro displacement in biomechanics. *MOJ App Bio Biomech*. 2019;3(6):137–140.
46. Afonin SM. Multilayer piezo engine for nanomedicine research. *MOJ App Bio Biomech*. 2020;4(2):30–31.
47. Afonin SM. Structural scheme of electromagnetoelastic actuator for nano biomechanics. *MOJ App Bio Biomech*. 2021;5(2):36–39.
48. Afonin SM. Parallel and coded control of multi layered longitudinal piezo engine for nano biomedical research. *MOJ App Bio Biomech*. 2024;8(1):62–65.
49. Afonin SM. DAC electro elastic engine for nanomedicine. *MOJ App Bio Biomech*. 2024;8(1):38–40.
50. Afonin SM. Multilayer engine for microsurgery and nano biomedicine. *Surg Case Stud Open Access J*. 2020;4(4):423–425.
51. Afonin SM. *A structural-parametric model of a multilayer electroelastic actuator for mechatronics and nanotechnology*. Chapter 7 in *Advances in Nanotechnology*. Volume 22. Eds. Bartul Z, Trenor J, Nova Science, New York. 2019;169–186.
52. Afonin SM. *Electroelastic digital-to-analog converter actuator nano and microdisplacement for nanotechnology*. Chapter 6 in *Advances in Nanotechnology*. Volume 24. Eds. Bartul Z, Trenor J, Nova Science, New York. 2020;205–218.
53. Afonin SM. *Characteristics of an electroelastic actuator nano- and microdisplacement for nanotechnology*. Chapter 8 in *Advances in Nanotechnology*. Volume 25. Eds. Bartul Z, Trenor J, Nova Science, New York. 2021;251–266.
54. Afonin SM. *An absolute stability of nanomechatronics system with electroelastic actuator*. Chapter 9 in *Advances in Nanotechnology*. Volume 27. Eds. Bartul Z, Trenor J, Nova Science, New York. 2022;183–198.
55. Afonin SM. Rigidity of a multilayer piezoelectric actuator for the nano and micro range. *Russ Engin Res*. 2021;41(4):285–288.
56. Afonin SM. *Structural scheme of an electromagnetoelastic actuator for nanotechnology research*. Chapter 45 in *Physics and Mechanics of New Materials and Their Applications*. PHENMA 2023. Springer Proceedings in Materials. Volume 41. Eds. Parinov I.A., Chang S.H., Putri E.P., Springer, Cham. 2024;486–501.
57. Nalwa HS, editor. *Encyclopedia of nanoscience and nanotechnology*. USA: American Scientific Publishers. 25 Volumes. 2019.
58. Bhushan B, editor. *Springer handbook of nanotechnology*. Germany: Springer. 2017;1500.