

# Some downhole applications of swelling elastomers in oil and gas wells

## Abstract

Advanced polymers that exhibit volume increase when immersed in water or oil are known as swelling elastomers. They have been successfully used in recent years in downhole sealing applications in oil and gas drilling. Various case studies of use of swell packers can be found in published literature. However, these reports are usually targeted at only a couple of associated applications. To give a more holistic approach, the current paper describes many major applications of swelling elastomers in the petroleum industry. When undesirable zones are separated from production zones, it is called zonal isolation. Safeguarding production lines from water incursion is known as water shutoff. Techniques used to protect the wellbore from invasion of sand come under the umbrella of sand control. One of these is the use of sand screens, providing protection against plugging and wear of well equipment. Well completion is the series of tasks required to make the well production-ready, the most important one being cementing. Well stimulation consists of enlargement of existing passages or formation of new ones for improved production. Swellable elastomers have been successfully employed in all of these applications, paving the way for improved or enhanced oil recovery in a relatively low-cost manner for long-term and effective solutions. These, and other applications, are discussed in the paper. This brief overview can be beneficial for petroleum students, field practitioners, researchers, and application designers.

**Keywords:** swelling elastomer, zonal isolation, enhanced oil recovery, well completion, intelligent well, well stimulation, underbalanced drilling

Volume 3 Issue 3 - 2018

 Maaz Akhtara,<sup>1</sup> Sayyad Zahid Qamarb,<sup>2</sup>  
 Tasneem Pervezb<sup>2</sup>
<sup>1</sup>University of Engineering and Technology, Pakistan


<sup>2</sup>Sultan Qaboos University, Oman

**Correspondence:** Sayyad Zahid Qamarb, Sultan Qaboos University, Oman, Email sayyad@squ.edu.om

**Received:** March 28, 2018 | **Published:** May 10 2018

## Introduction

Swelling elastomers are a new breed of advanced polymers that swell upon interaction with fluids like water, oil, or acid. Swelling results in change of geometry, density, hardness and other properties.<sup>1-4</sup> Water-swelling elastomers swell through the absorption of saline water following the mechanism of osmosis, while oil-swelling elastomers swell by the absorption of hydrocarbons through a diffusion process.<sup>5,6</sup> Swelling rate depends on the temperature, pressure, type of elastomer and fluid composition. Swelling elastomers have become the default material for certain petroleum applications like zonal isolation. Schematic illustration of the construction of a typical swellable packer is shown in Figure 1. Through different swelling elastomer applications, profitability of old wells can be maintained, production from abandoned wells can be restarted, and production from inaccessible new reservoirs can be achieved economically.<sup>7,8</sup>

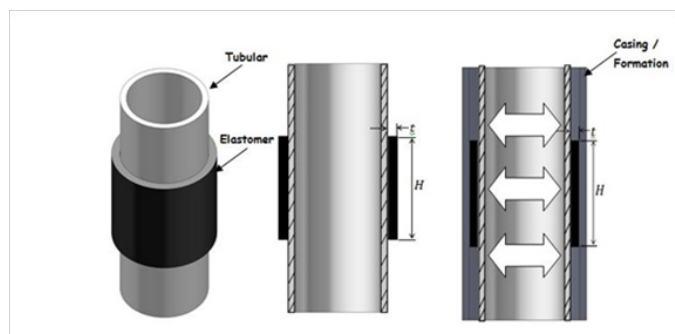

**Figure 1** Arrangement of inner steel tubular, elastomer, and rock formation in a typical swellable packer.


## Applications of swellable elastomers

The self-operating mechanism of swell packers leads to easy installation and execution, thus saving a significant amount of rig time and associated costs. Some case studies about deployment and execution of swellable elastomers in the more important oil and gas applications are discussed in the following sections.

### Zonal isolation

Zonal isolation refers to techniques used for prevention of mixing of redundant fluids from unwanted regions with production fluids. Conventionally, zonal isolation in a well bore is carried out by cementing the production string in place, and by appropriate use of casing plugs and packers. Figure 2 shows the free swelling of elastomer for effective zonal isolation. Asab field Abu Dhabi, a mature carbonate reservoir was drilled in 1985 and horizontally sidetracked in 1999. By 2005, water cut increased from 14% to 25%, significantly reducing the oil production.<sup>9</sup> Water was coming from the fractures due to the failure in the placement of cement plugs at the toe. Swellable packers were used to isolate the unwanted zones and resulted in a huge decrease in water cut from 25% to 0.3%. In Malaysia South Furious field, deployment of swelling elastomers resulted in reduction of water cut, production starting the very next day, even before complete swelling of the elastomer.<sup>10</sup> Enhanced oil recovery (EOR) techniques can be used for higher recovery from dwindling old reservoirs or difficult new ones. The required isolation of oil/gas and water can be successfully achieved through a combination of swelling elastomers and primary cementing. Petroleum Development Oman executed its first EOR plan in the Harweel Cluster Southern Oman using miscible gas injection. Proper isolation of zones was required

for improved hydrocarbon recovery. Cementing failed in many applications, leading to the use of swelling elastomers, yielding very good results.<sup>11</sup> Water production management, sand control, reservoir compartmentalization, production separation, inflow profile control, and control of condensate banking are other important applications in which swellable elastomers are used for zonal isolation.

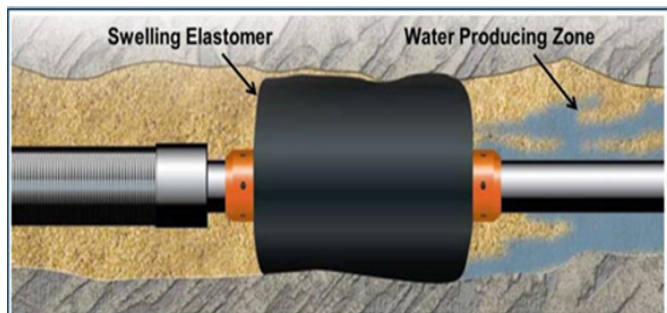

**Figure 2** Schematic of a typical swellable packer used for isolation of water producing zone.


### Well completion

In petroleum applications, all the operations carried out until the well is ready for production are collectively known as well completion. Drilling of the hole, running/cementing of casing, continuing drilling the hole until desired depth is reached, and perforation/stimulation of casing, cement and formation makes up well completion. Purpose of cementing is to provide significant hydraulic seal between casing and formation which prevents annular flow and isolation of individual zones. Intelligent well is a special type of well that maximizes or enhances hydrocarbon recovery by installing unique completion and monitoring tools adjustable either automatically or with human intervention. An intelligent well completion with swellable elastomer reduces development costs and optimizes the production as it provides effective zonal isolation which cannot be achieved in conventional perforating and cementing techniques. In the offshore Al-Khalij in Qatar, remediation of corroded and damaged tubular was carried out using the intelligent well approach.<sup>12</sup> Before initiating the recompletion, use of alternative packer technology was investigated. Reliable hydraulic sealing mechanism can lead to remediation/work-over that is technically and economically feasible for such mature reservoirs. Swellable elastomer packers were used, extending the life of well and enhancing the recovery. Swellable elastomer can also be used with open-hole, cased-hole, horizontal well, and solid expandable tubular (SET) technology as a completion tool.<sup>13,14</sup>

### Stimulation operations

Enlargement of old channels or creation of new ones is sometimes required in the producing zone of a well. Achieved by techniques such as acidizing, formation fracturing, etc any such process is known as stimulation. Fracturing is a stimulation method based on opening of new flow channels in the rock structure around a production well, increasing the surface area for formation fluids to flow into the well, and also extending past any possible fractures near the wellbore. Rutger e discuss the use of swelling elastomer packers in stimulation operations; Figure 3. Major challenges are down-hole environmental


conditions such as average temperature and pressure, shrinkage forces of the pipe, and thermal effects that cause contraction of the seal (this may result in temperature fall due to contact with stimulation fluid). Expandable liner hanger, swellable elastomer packers, and ball drop sleeves were used by an operator in USA for stimulation in horizontal open-hole completions, giving successful results.<sup>15</sup> Hydraulic fracturing, matrix acidization, and multi-stage fracturing are other areas where swellable elastomer technology is successfully deployed.

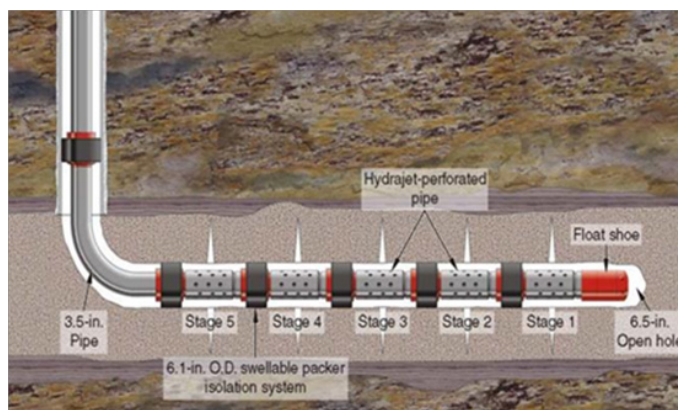

**Figure 3** Use of swelling elastomer packers in stimulation operations: hydra-jet perforation system.

### Underbalanced drilling

During underbalanced drilling (UBD) of oil and gas wells, pressure in the wellbore is deliberately kept lower than the formation fluid pressure; Figure 4. This is done to allow formation fluids to rise to the surface while drilling, preventing damage to the formation being drilled. UBD technique is used to determine possible thief zones so that swellable packers can be placed correctly.<sup>16</sup> UBD combined with swelling elastomer can offer an efficient zonal isolation mechanism. It can help maximize well performance and can lead to ultimate improvement in hydrocarbon recovery. Richard et al. explain the use of underbalanced drilling in Nimr reservoir Oman.<sup>17</sup> Data retrieved by UBD shows that rogue fractures and thief zones play a crucial role in water movement. Swellable elastomers are deployed for water shutoff identified by UBD.

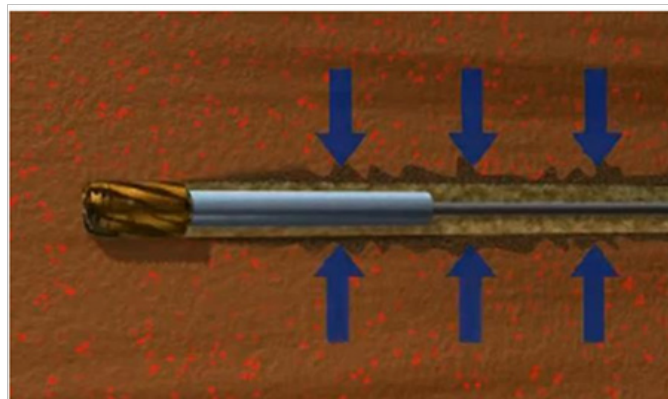

**Figure 4** Underbalanced drilling.

## Evaluation of swellable packers

Swell packers are a new technology replacing conventional techniques in various petroleum applications. There should be some method for assessment of the performance of these new applications. Wire line ultrasonic measurements are used to evaluate zonal isolation achieved using swellable packers. Herold et al.<sup>5</sup> discuss the appraisal of swelling elastomer tools for proper zonal isolation using conventional and latest ultrasonic tools. Amongst all ultrasonic techniques employed, third interface echo (TIE) gives more promising results to ensure hydraulic seal and zonal isolation in the case of swelling elastomer.<sup>18</sup> Other authors<sup>19–21</sup> describe experimental, analytical, and numerical methods for performance evaluation of swell packers and other types of swelling elastomer seals deployed in downhole petroleum applications.

## Future trends

Swellable elastomer is an expanding and evolving technology with a huge potential. However, many challenges are still there to be overcome. Its use in extreme well environments of high-pressure and high-temperature (HPHT) is still questionable. Highly acidic and chemically more reactive aggressive reservoirs are also unexplored areas. Development of new swelling-elastomer materials and designing of improved and innovative applications is a need of the moment for the working envelope of HPHT and aggressive reservoirs.

## Conclusion

Utilization of swellable elastomer technology offers feasible alternate solutions in well completion, well remediation, annular hydraulic isolation, and facilitating other applications. It has also proved to be economical in terms of rig time and cost involved. It helps in improving production volume and rate of hydrocarbon recovery, thus decreasing the impact on environment. Swellable elastomer technology in few areas is used for remediation and recompletion after the failure of tubular, cement, or due to excess water-cut. Looking at the vast potential of this technology, it should be considered during the design phase of a well (rather than a purely remediation strategy) in order to save time and money wasted due to well shutoff. This review can be useful for field engineers in selecting appropriate swelling-elastomer tools, and for research and development teams in designing new applications.

## Acknowledgements

Support of Sultan Qaboos University and Petroleum Development Oman is gratefully acknowledged for this work.

## Conflict of interest

The author declares that there is no conflict of interest

## References

1. Qamar SZ, Hiddabi SA, Pervez T, et al. Mechanical Testing and Characterization of a Swelling Elastomer. *Journal of Elastomers and Plastics*. 2009;41(5):415–431.
2. Pervez T, Qamar SZ, Siddiqui RA, et al. Effect of Exposure on Material Response of a Swelling Elastomer. *Archives of Materials Science and Engineering*. 2009;37(2):77–84.
3. Pervez T, Qamar SZ, Van de Velden M. Comparison between Fresh and Exposed Swelling Elastomer. *Journal of Elastomers and Plastics*. 2012; 4(3):237–250.
4. Qamar SZ, Pervez T, Akhtar M, et al. Design and Manufacture of Swell Packers: Influence of Material Behavior. *Journal of Materials and Manufacturing Processes*. 2012;27(7):721–726.
5. Herold BH, Edwards JE, Kujik RV, et al. Evaluating Expandable Tubular Zonal and Swelling Elastomer Isolation using Wireline Ultrasonic Measurements. SPE Asia Pacific Drilling Technology Conference and Exhibition; 2006 November 13–15; Thailand.
6. Qamar SZ, Akhtar M, Pervez T. Swelling Behavior of Soft and Biological Materials. *Key Engineering Materials*. 2015; 656-657:580-585.
7. Qamar SZ, Akhtar M, Pervez T, et al. Mechanical and Structural Behavior of a Swelling Elastomer under Compressive Loading. *Materials and Design*. 2013;45:487–496.
8. Pervez T, Seibi AC, Al-Hiddabi SA, et al. Solid Tubular Expansion in Horizontal Wells. 15<sup>th</sup> SPE Middle East Oil and Gas Show and Conference, 2007 March 11–14; Bahrain.
9. Al-Saiid KA, Abdalla E, Cherif M, et al. Practical Uses of Swellable Packer Technology to Reduce Water Cut: Case Studies from the Middle East and Other Areas. IPTC 2007: International Petroleum Technology Conference; 2007 September 4–7; Scotland: UK.
10. Kleverlaan M, Van Noort RH, Jones I. Deployment of Swelling Elastomer Packers in Shell E&P. SPE/IADC Drilling Conference; 2005 February 23–25; Netherlands.
11. Laws MS, Elliot FJ, Harry S, et al. PDOBs Proactive Approach to Solving a Zonal Isolation Challenge in Harweel HP Wells Using Swell Packers. SPE Asia Pacific Drilling Technology Conference and Exhibition; 2006 November 13–15; Bangkok, Thailand.
12. Charles PE, Jaafar MR, George BC, et al. Corroded Casing: Testing of Sealing Capability and Retrievalability of a Swellable Elastomer Packer. SPE Annual Technical Conference and Exhibition; 2008 September 21–24; Colorado, USA.
13. Kennedy GP, Renee LA, Karim SA, et al. The Use of Swell Packer's as a Replacement and Alternative to Cementing. SPE Annual Technical Conference and Exhibition; 2005 October 9–12; Texas, USA.
14. Kalyani T, Ram A, Kumar SA, et al. Swellable Packers in Unique Horizontal Completions Solves Difficult Challenges in Offshore India Vasai East Field. Offshore Europe; 2009 September 8–11; UK.
15. Rutger E, Dustin AY, Gregory WV, et al. Design Methodology for Swellable Elastomer Packers in Fracturing Operations. Offshore Technology Conference; 2009 May 4–7; USA.
16. John R. Underbalanced Drilling in the Reservoir, an Integrated Technology Approach. SPE Russian Oil and Gas Technical Conference and Exhibition; 2006 October 3–6; Russia.
17. Richard SM, Deepankar B, Suryanarayana PV. Impact of Thief Zone Identification and Shut-off on Water Production in the Nimr Field. SPE/IADC Underbalanced Technology Conference and Exhibition; 2004 October 11–12; USA.
18. Al-Kindi ZL, Al-Suwaidi AS, Ibrahim ME, et al. Increased Certainty in the Determination of Zonal Isolation Through the Integration of Annulus Geometry Imaging and Improved Solid-Fluid Discrimination. SPE Middle East Oil and Gas Show and Conference; 2009 March 15–18; Bahrain.

19. Akhtar M, Qamar SZ, Pervez T, et al. Performance Analysis of Swelling Elastomer Seals. *Petroleum Science and Engineering*. 2018;165:127–135.
20. Qamar SZ, Pervez T, Akhtar M. Performance Evaluation of Water-Swelling and Oil-Swelling Elastomers. *Journal of Elastomers and Plastics*. 2016;48(6):535–545.
21. Al-Hiddabi SA, Pervez T, Qamar SZ, et al. Analytical Model of Elastomer Seal Performance in Oil Wells. *Applied Mathematical Modelling*. 2015;39(10–11):2836–2848.