

Towards sustainable aquaculture in armenia: strengthening capacity through advanced technologies of trout-farm management for small-scale producers

Abstract

The present study examines the possibility of introducing a new approach for rainbow trout production for small scale producers in Armenia. This approach is based on the intensity of economic activity by modernizing the production processes leading to measurable economic and environmental benefits. The study shows that the modernization of the standard model of the enterprise, which initially produces two tons, results in an increase of the annual performance of the module up to eight tons. By investing; slightly over 25,000 USD; in modernizing the production processes, it becomes possible to reduce the production cost (USD/kg fish) from 3.04 USD using the traditional approach to 2.68 USD in the first year reaching 2.24 USD by the fourth. At the same time, the production technology changes; during the implementation of the pilot module (including change of water disinfection technology); result in a water consumption reduction of the enterprise of more than 300,000 m³ per year, along with the pollution reduction of natural water bodies by persistent disinfectants. Thus, introducing the advanced technology leads to:

- A significant reduction in the production costs, which in turn increases the income for small scale producers
- Rationalizes the consumption of limited resources of artesian water which reduces the pressure on the freshwater ecosystems
- Increasing the level of environmental sustainability.

Keywords: Small scale producers, Profitability, Cost reduction, Prime cost, Payback, Intensification of production, Recirculation aquaculture system, Water resource management, Impact on freshwater ecosystems

Volume 2 Issue 5 - 2015

Karen Aghababyan, Gurgen Khanamirian
American University of Armenia, Armenia

Correspondence: Karen Aghababyan American University of Armenia, Baghramian 40, Yerevan, Armenia, Tel +37495 544405, Email Karen@aua.am

Received: June 22, 2015 | **Published:** September 08, 2015

Abbreviations: Kg, kilogram; kW, kilowatt; L/sec., Liters Per Second; L/min., Liters Per Minute; m, Meters; mg/l, Milligrams Per Liter; m², Square Meters; m³, Cubic Meters; Mm³/year, Million Cubic Meters Per Year; AMD, Armenian Drams (local currency)

Introduction

According to the “Food and Agriculture Organization”,¹ a steady growth trend of the aquaculture sector worldwide is observed. Modernized technological approaches are being actively developed and implemented in many countries (Denmark, Norway, Germany, Australia, New Zealand, Singapore, China, Canada, and USA).² Such efforts aim to the formation of a new type of enterprises that is corresponding to the modern demands (rational use of water resources, applying environmental friendly technologies of disease prevention and disinfection, optimization management of the enterprise), leading to production intensification, and Nature rational use. In these countries, the state agencies responsible for natural resources management are creating a legal, regulatory and tax environment for supporting services and promotion of activities of aquaculture enterprises.³

The aquaculture sector in Armenia shows stable growth since early 2000s with an annual growth rate of 12 to 20%.⁴ In 2013, the Arminian fish production was 11,600 tons, of which 6,300 tons were rainbow trout.^{5,6} However, out of more than 230 enterprises represented in

the sector, only 2% is responsible for about 44% of the production output. The remaining 56% of the production (6,500 tons) comes out of small scale producers. However, the water resource suitable for the aquaculture of both salmon and sturgeon is limited, with an annual consumption rate of 10-17%.⁷ Meanwhile, the regulatory measures established by the government, mainly aimed at enhancing the rates of water. Thus, the tariff for artesian water taken from the well, according to the decree № 864 from 30.12.1998 with the amendment number 123-N from 30.12.2013, was increased by 10 times.⁸ Thus, the total payments for the exploitation of water resources are now one of the major cost items, especially for small scale producers. Such cost directly affects the production prime cost, since all enterprises in the sector, except for one cage farm on Lake Sevan, practice flow-through method. In that method the water (the vast majority of which comes from artesian source) flows through a series of fish-tanks, without being reused and is discharged in a volume corresponding to the volume of intake. In such systems, according to our surveys, the productivity does not exceed 25-30 kg of fish per cubic meter of water which is very low, in terms of the economics of the farm, as well as the resource use.

Introducing the modern production practices, in small-scale producers, will intensify their current production between 75 and 100 kg of fish per m³ and increase the water reuse, reducing its intake to 70%. In other words such practice can thereby raise the efficiency

of resources used and significantly improves the farm economic performance. Such practices can also strengthen the competitive capacity of these producers as well as their market share.²

The objective of the present study is to prepare a preliminary feasibility study including:

- I. A generic model of semi-intensive approach.
- II. The prime cost of its production.
- III. It's payback period.
- IV. The necessary conditions for implementing such approach and its introduction into business practices.

Materials and methods

Traditional management approach data (common production approaches, system design, feeding & disinfection practices, farm operation modes, and staffing) were collected from over 30 different trout-farms across the country. Information on seed material suppliers and cost, feed manufacturers and cost, as well as the cost of local logistics and basic conditions of credit resources were also collected. Other information was also collected as follows:

- A. Information on the water volume and energy consumption by aquaculture sector as well as their tariffs was collected from the Ministry of Nature Protection.⁸
- B. Information on the number of enterprises in the aquaculture sector, product types, and the production volumes were conducted from the Armenian Ministry of Agriculture as well as the Armenian Statistical Agency.⁷
- C. Information on the loaning conditions, of the aquaculture sector, was collected from four leading Armenian banks (Ardshinvest Bank, Ameriabank, AGBA Credit Agricole, and Armenian Development Bank). The surveys, with a purpose to identify sales price at farms, wholesalers, and retail, were also conducted.

Moreover, the computation data of a realistic experimental model were collected from 12 trout-farms in Denmark. These data includes information on the types of production systems, the volume of resources (water, energy, land) consumption and their costs, common systems of farm management, including approaches of feeding, disinfection, disease prevention and internal logistics. Information on standard operational procedures and regulations, the number of personnel in the enterprise, the modes of its operation, as well as automated control systems, if any, were also collected. More data were collected on the methods of water resource natural-cleaning via buffer wetlands (which have a wide distribution), as well as on existing systems of tax stimulations of such approaches.

Results and discussion

For modeling of the proposed technology we used fish-farming enterprise with the following annual profile: water consumption–548,658 m³, electricity consumption–34,146 kW and productivity–10 tons of trout per year. The production area consisted of 10 standard fish-tanks; the dimensions of each were 9 m length x 2.5 m width x 1.5 m depth. Fish rearing was implemented using traditional technology, resulting in an annual production capacity (productivity) of 2 tons for each standard module consisting of two fish-tanks (Figure 1). In the experimental model, an area of two fish-tanks was allocated and modernized by the plan, as shown in Figure 1, leading to an increase in the annual production capacity from 2 to 8 tons.

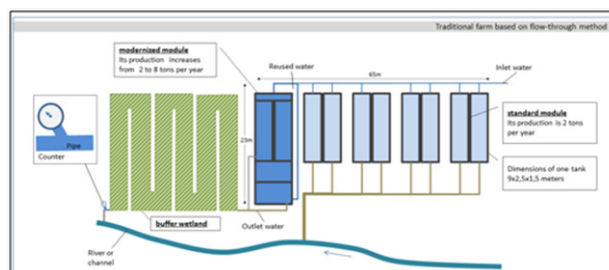


Figure 1 General view of fish-farm with one modernized module.

Description of the model, main processes, components' cost and work

In the present study, an upgraded experimental module was used. This upgraded module consists of two fish-tanks, mechanical and biological water treatment components in addition to a number of supporting elements (Figure 2). The first compartment is a water collector (point 1) in which the controlled water proportions¹ are mixed. Water resource used in most of fish-farming enterprises was artesian. This water, in most cases, has low in nitrates, phosphates, heavy metals, and relatively stable temperature (from 13°C to 18°C, depending on the source) which are favorable characteristics for production. On the other, the level of dissolved oxygen (DO) saturation this water was very low (3.9 mg/l at 13°C), whereas the level of carbon dioxide (CO₂) was quite high (80-90 mg/l). There used water, representing 70% of water falling in the collector, has a significant oxygen potential (7 mg/l at 13°C), in comparison with the makeup water. Along with this, disinfectant per acetic acid was added to the mixed water. Such acid, was used as it decays in less than a minute^{9,10} leading to much faster impact on the environment than the other sustainable disinfectants (like malachite green and formalin) commonly used with end products carbon dioxide, water and oxygen. The disinfectant supply was carried by droplets through the PAA dozer (point 4) directly into water collector, then the mix of reuse and makeup waters with oxygen saturation of 65%, flows from the bottom of the water collector into the second compartment.

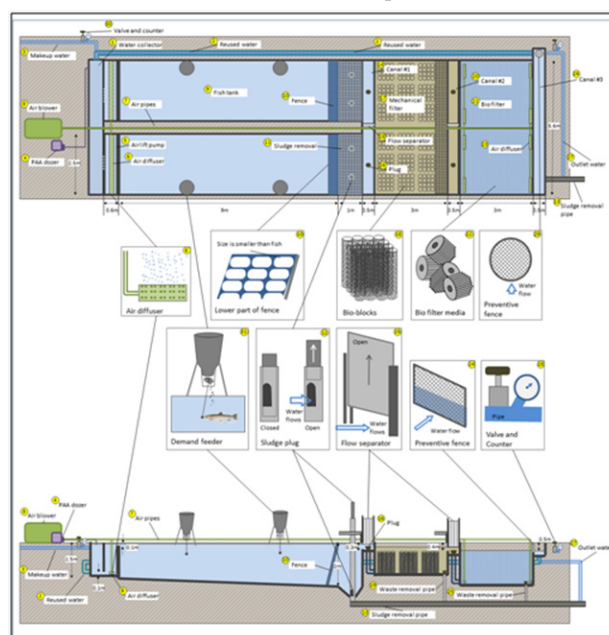


Figure 2 Outline of the modernized experimental module.

In the second compartment the airlift pump (point 5) was set. It is a 60 cm width channel which is connected to the air blower (point 8) via pipes (point 7) with a bottom extending along the entire length of the diffuser (point 6). The blower was used to inject the air to raise the water level to the top of the fence, leading to the next compartment. Along with this, the water becomes more saturated by dissolved oxygen reaching the level of 90% that is favorable for trout. The third compartment is the fish-tanks (point 9), in which the rearing for the rainbow trout fish was implemented and the fish were fed by demand feeders (point 31). Each tank has The dimensions of each of these tanks were 9 m length x 2.5 m with a depth of 1.5 m at the beginning of the tank and 2 m at the end of it, forming a ramp of about 50, whereby there is a near-bottom current towards a settling cone (point 11). This settling cone is a part of sludge removal section where both uneaten food residue and feces were accumulated. At the bottom of this cone there is a hole with sludge plug (point 12), periodic lifting which allows the settled particles to be washed, outputting them via pipe system (point 13) to the buffer wetland see Figure 1, together with 4-5% water. Then the water falls by gravity to the next compartment. The fourth compartment is a canal # 1 (point 14), which precedes a mechanical filtration compartment (point 17). This canal is provided with a flow separator (point 15), and pipe plugs on the output (point 16) that is intended to distinguish the water streams during the tank cleaning. In normal operation mode the flow separator is closed.

The fifth compartment is the mechanical filter (point 17) where the mechanical filtration process takes place. It consists of two swimming pools with dimensions of 3x2.8x1 m, where the vertically-situated bio-bloks of 70 cm high (point 18) are located. Water is supplied into the lower part of the tank through a pipe, then slowly rises up to the top, passing through bio-bloks in which suspended particles are deposited, and bio-decomposed by heterotrophic bacteria. Both the bio-bloks and the tank itself require regular cleaning (once every two days). Waste water that emerges during this cleaning procedure is washed off by waste removal pipe (point 19). Canal # 2 (point 20) is the sixth compartment which has a buffering function and is identical to canal # 1.

The biological filtration process takes place in the fifth compartment (point 21). This compartment consists of two tanks with dimensions of 3x2.8x1.5m. This type of bio-filter is filled with light-weight bio-filter media (point 22), and provided with four air diffusers (point 23), located in the corners of each tanks, to ensure constant water circulation. These two bio-filter Medias provide a growth substrate for nitrifying bacteria promoting transformation of ammonium into relatively safe nitrate for trout fish. Then the water that passes through the barrier fences (point 24) falls by gravity to the next compartment. The biofilter cleaning procedure is identical to that of the mechanical filter mentioned above but only once every two weeks. The waste water is also washed off by waste removal pipe (point 25).

The last compartment is a canal # 3 (point 26), in which water flows from both sections of biofilter, is united, then before passing through the barrier fence (point 29) that prevents large mechanical particles from entering the pipe. Most of the water (70%), by gravity, is moved back into the water collector, closing the cycle. The remaining 25% of the water is discharged from the system by valve regulation (point 28), outputting them via pipe system to the buffer wetland see Figure 1, which in the basic variant has a serpentine shape (in our case—with a total area of 2420m²). The aquatic plants, abundantly planted in it, absorb decaying organic compounds, serving as a natural filter. The configuration and size of buffer wetlands can vary depending on the farm production characteristics. Table 1 shows the estimated costs for

the modernization of the module. This estimation showed in the table includes the cost of purchase, delivery and installation of equipment.

Table 1 Cost estimate for modernization of the module

Species:	Unit	Price per Unit USD	Number of Units	Total
Rainbow Trout				
1. Equipment and supplies				19,019
1.1. Bioblocks	m3	350	8	2,800
1.2. Bio-filter media	m3	450	16	7,200
1.3. Air Blower	unit	1200	1	1,200
1.4. Diffusers	unit	200	6	1,200
1.5. Sludge Removal Units	unit	120	4	480
1.6. PAA dozer	unit	320	1	320
1.7. Demand Feeders	unit	150	4	600
1.8. Fence for Fishes	unit	500	2	1,000
1.9. Flow Separator	unit	70	2	140
1.10. Preventive Fences	unit	20	2	40
1.11. Valves and Counters	unit	50	2	100
1.12. Stopper	unit	6	8	48
1.13. Covering Fences	m2	10	10	100
1.14. Water Pipes	m	2	67	134
1.15. Air Pipes	m	1.2	54	65
1.16. Electro Infrastructure	set	600	1	600
1.17. Diesel Generator	unit	550	1	550
1.18. Hygienic Equipment	set	60	1	60
1.19. Oxymeter	unit	650	1	650
1.20 Concrete Canals and Filter Tanks	m2	35	49.5	1,733
2. Construction				2,700
2.1. Construction of Tanks				800
2.2. Construction of Buffer Wetland				400
2.2. Plumber				600
2.3. Electrician				900
3. Logistics				3,810
3.1. Delivery of Equipment	kg	15	70	1,050
3.2. Transportation	day	80	1	80
3.3. Custom Service	cycle	250	1	250
3.4. Taxes		20%		2,430
Total				25,529

Computation of prime cost and payback

The enterprise modernization process was carried out gradually, taking into account the important socio-economic factors. One of these factors is the credit loan, which should be a value balanced

between the company's economic characteristics (turnover, revenues, costs, etc.)

- a. The bank credit risks assessment.
- b. Investments.
- c. Payback periods in order to increase the chances for small scale producers to receive such a loan. Another important factor that affected the gradual modernization was the speed of introducing the new technologies and the employees' ability to adapt to such technologies. It was also important to consider the farmer's cost of living and his ability to pay off credit loans.

Table 2 summarizes both the prime cost of rainbow trout and the modernization's payback of one of the enterprise modules. In the local market, rainbow trout fish is usually reared to the market weight of 800 grams, which was taken into account when calculating the number of seeding material. The loss due to fish mortality was estimated to be 10%, whereas in practice this percentage was somewhat lower. The tangible aspects of farm optimization, was the change of water usage operation that lowered the water consumption around 70%. Such reduction lowers the inlet water cost from 0.06 to 0.02 USD per kilogram of fish, and the outlet cost from 0.09 to 0.01 USD. However, the large scale introduction of such systems can have a significant cumulative effect.

Another important aspect for the farm optimization was the change of the production method leading to electricity consumption reduction. According to surveys of local farmers, energy consumption, in the conventional approach, ranged from 3.39 to 3.47 kW per kg fish per year on average. Whereas according to some authors¹¹ the intensification of production requires 1.27 kW per kg fish per year, which is achieved by means of centrifugal pump power of 0.75kW, which supplies 3107 L/min. of water and provides a necessary water flow of 10 L/sec.. The survey of the farmers in Denmark showed that the electricity needs in practice is slightly higher (about 1.5 kW per kg). Thus, as a basis for the comparative calculations, we took the survey data for both the modernized module (1.5 kW per kg), and the traditional module (3.41 kW per kg), leading to cost reduction between 0.3 to 0.13 USD per kg of fish.

Another important economic factor of the optimization is the regular management of water parameters and feeding technology. In conventional approach, local farmers calculate the daily feeding rate based on the fish size only (excluding the other related factors), water temperature was only considered in some individual cases. However, according to some studies,^{6,12} the fish activity and their appetite is conditioned not only by seasonal temperature variations, but also largely by the water physicochemical parameters, in particular the oxygen saturation level (at least 80%) as well as the ammonia concentration (less than 0.2 mg/l). Lack of control systems for these parameters in the business practices manual feeding method lead to a significant loss of feed in the conventional approach. Obviously, the standard operational procedures and regulation development aimed at controlling the level of oxygen and other significant water characteristics on the one hand, and the introduction of demand feeder on the other, significantly reduce the feed cost (up to 26%). In Denmark, the efficiency of demand feeder technology is confirmed by its wide spread through all trout farms with a deferent automation levels. Thus, the experimental module modernization, accompanied with the regulations controlling the oxygen level, and the demand feeder of the basic technology will lead to cost reduction per kg fish from 2.23 to 1.65 USD. Since the production intensification is inevitably associated with fish diseases so the introduction of permanent but

gentle method of water disinfection as part of the technological process is a must,¹³ this disinfection process will increase the costs, but the overall production increase and cost reduction per unit of production in other categories, eliminates these costs. It also leads to some inevitable changes to the enterprise management approach as well as the qualification requirements to the personnel.

Questioning of private farms on rainbow trout rearing in Denmark clearly showed that the average farm (with the water intake of 200 L/sec., power consumption 375,000 kW per year, producing 250 tons of rainbow trout of standard size) can be operated by one person. This is due to the development and implementation of standard operating procedures, rules, collection of production statistics and high personal motivation, which allow the farmer to be daily engaged in the industrial management (spending 2 to 4 hours per day) and to involve the auxiliary unqualified personnel upon necessity. Most of the small scale producers surveyed in Armenia are not engaged in active sales, they focus more on wholesalers. The Table 2 explains, to a large extent, the relatively low transportation costs. The surveys present study allowed us to estimate the price range of sales from the farm, which was ranged from 1,600 to 1,800 AMD, with the averaged value of 3.62 USD per kg. As the prices for live fish, in this segment, fluctuates between 4.68 to 6.38 USD, it will be more beneficial if to the farmers to be engaged in the retail sale on their own to increase their revenue.

As the loan balance was decreasing annually by about 25%, its annual interest value was also decreased. This reduction beside other factors helped in reducing the annual total cost from 21,473 USD in the first year to 17.89 USD in the fifth year. A quick look in table 2, one should notice that the consolidated cost per kilogram, were gradually reducing over a period of four years to reach 2.24USD. In comparing the impact of both the traditional and the modernized production approaches on the income, during each of the five years, Table 2 one can see the obvious advantage of using the modernized technique. In using such technique, the annual income was increased from 4.673 USD (using the conventional approach) to 7,516 USD in the first year (Total of 12,188 USD) reaching up to 11,090 USD by the end of the fifth year (Total of 15,762 USD). Obviously, the increased attention from the state authorities and the banking sector towards the development of incentive programs of preferential lending will contribute in the development of small scale producers. Along with this, we note that most of fish-farms of the republic, according to the decree of the RA LA-118, are not subject to tax scale, till it reaches an annual turnover of more than 100-million AMD (or 212,000 USD) then it will be subjected to VAT (Value Added Tax) which is about 20%.¹⁴

The potential target group of enterprises is encountered with no less than 100 farms, with individual performance exceeding 10 tones. However, the success of such approach will largely depend on its popularization, which requires the implementation of a pilot project, which will encourage the small scale producers. Choosing the enterprise of average production which has minimum necessary infrastructure and motivation to increase the current production, as a model, will create a favorable atmosphere for the implementation of pilot initiative. To accelerate the process, it will be much more convenient for farmers to be informed about the equipment's' suppliers, delivery times, construction and installation dates, seasonal and technical aspects of the RAS, the growth rate, the stocking density, and the fish mortality rate, etc.. Such information, will allow the farmers to get acquainted with their available options to take the best choices for their favor. Along with this, the development of specialized educational trainings aimed at improving the farmer's

skills and personnel management of fish-farms will further motivate the benefit of switching to a modern production mode.

Modernization, use of resources, ecological benefits

Figure 3 revealed that the Armenian fish production from the aquaculture sector increases with the increase in water consumption. Unfortunately, there was no official statistical data available for the annual artesian water consumption (either for total or aquaculture aspect). However, according to the available literature, the total annual artesian water consumption was found to be ranging between 2,021 Mm³/year in 1985¹⁵ and 1,624 Mm³/year¹⁶ in 1983. The USAID report,¹⁷ monitoring the intake artesian water for both 2007 and 2013, indicated that the total annual artesian water consumption were more or less that same (Figure 4) while the share of artesian water used in the aquaculture sector was increased from 400.6 Mm³/year in 2007 to 1119.4 Mm³/year in 2013 (Figure 4).

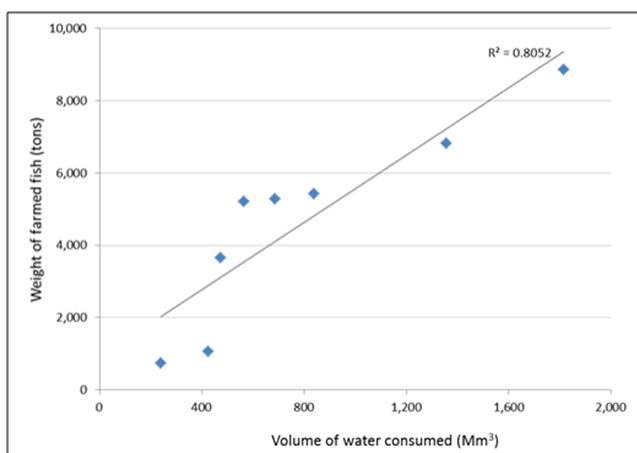


Figure 3 Interrelation between fish production and use of water.³

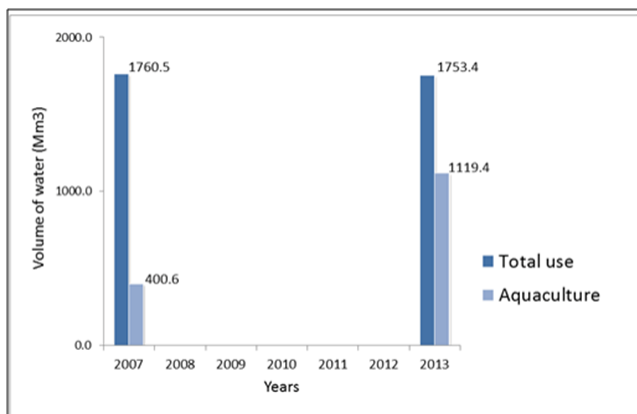


Figure 4 The artesian water intake for during 2007 and 2013 (USAID, 2014).

In our present study, the module that produces about two tons of trout in the conventional way consumed about 440,000 m³ of water, while its modernization can reduce this amount by 70%, saving more than 300,000 m³ of water per year. Thus, based on a single enterprise, with production capacity of about 10 tons of trout will save around 1.5 Mm³/year. In other words it will not only result in obvious economic effect of resource use, but also generate significant environmental benefits in the future. In addition, as mentioned earlier, to the gentle, permanent disinfection method,^{13,18} thereby reducing the pollution of freshwater ecosystems.

Conclusion

Efficiency and sustainability of the above mentioned systems, does not cause a reasonable doubt, as proved by many years of statistics and a number of countries. One can say that the introduction of the modern approaches will help in improving of the welfare of small scale producers and local communities and establishing new level of resources usage in the country.

Acknowledgments

None.

Conflicts of interest

None.

References

1. FAO. The state of world fisheries and aquaculture 2000. *Corporate Document Repository*, Italy. 2000;pp.158.
2. Timmons MB, Ebeling JM, Wheaton FW, et al. *Recirculating Aquaculture Systems*. (2nd edn). *Cayuga Aqua Ventures LLC*, USA. 2002;pp.769.
3. Aghababayan K, Khanamirian G. Opportunities and restrictions for sustainable development of aquaculture sector in Armenia. *Fisheries and Fish Farming*. 2014;6:7.
4. FAO. Review of fisheries and aquaculture development potentials in Armenia". *FAO Fisheries and Aquaculture Circular No. 1055/2*, Italy. 2011;p.48.
5. Ministry of Agriculture of the Republic of Armenia. Output from fish production rises to 11,600 tons in Armenia in 2013. *Arka am*. 2013;16:22.
6. Sánchez-Vázquez FJ, Yamamoto T, Akiyama T, et al. Macronutrient self-selection through demand-feeders in rainbow trout. *Physiol Behav Mar*. 1999;66(1):45–51.
7. Statistical yearbook of Armenia. Yearbooks, USA. 2013;pp.572.
8. The Law Of The Republic Of Armenia On Nature Protection And Nature Utilization Payments. 1998.
9. Environ Tech Chemical Services, Inc.Environmental Assessment. 2006;p.6.
10. Aghababayan K, Khanamirian G. Pollution of freshwater ecosystems by products of water disinfection and disease prevention chemicals. *Electronic Journal of Natural Sciences, National Academy of Sciences of RA*. 2015;1(24):72–75.
11. Wurts, WA, McNeill, SG, et al. Performance and design characteristics of airlift pumps for field applications. *World Aquaculture*. 1994;25(4):51–54.
12. Mohapatra BC, Sarkar B, Sharma KK, et al. Development and Testing of Demand Feeder for Carp Feeding in Outdoor Culture System. *Indian Council of Agricultural Research: the CIGR Ejournal Manuscript No*. 2009;1352(9):22–31.
13. Pedersen LF, Pedersen PB, Nielsen JL, et al. Peracetic acid degradation and effects on nitrification in recirculating aquaculture systems. *Aquaculture*. 2009;296(3–4):246–254.
14. Law of RA on the Value Added Tax. 1997.
15. Vehuni TE. Natural resources of groundwater resources of the Armenian SSR and prospects of their use. Yerevan in Russian. 1975.
16. Aghinyan HA. Natural and operational resources of groundwater of the Armenian SSR as of 01.01.1976. 1983.
17. 14 USAID. Groundwater Resources in Ararat Valley: Study Findings Presented. USAID For Immediate Release, USA. 2014;pp.62.
18. Kitis M. Disinfection of wastewater with peracetic acid: a review. *Environ Int Mar*. 2004;30(1):47–55.