

Statistical quantification of Zanjan City structures based on FEMA 154

Abstract

After introducing the code provisions for vulnerability assessment of the buildings, only more important structure such as state buildings and schools have been retrofitted. Since the most of the cultural and economic costs after any earthquake are associated with the residential buildings, it is important to have a rapid procedure for investigating the vulnerability level of the structures. There are several reasons to rationalize the lack of the vulnerability assessment for residential buildings such as limited financial resources for local governments, and the lack of a generalized mechanism. In this study, the visual vulnerability assessment of the residential buildings in the city of Zanjan, one of the major cities located in Iran, has been investigated. In order to perform the rapid vulnerability assessment of the buildings, different approaches have been proposed. The method introduced by ATC-21, later proposed in FEMA-154, is one of the mostly-accepted assessment methods. The goal of the rapid vulnerability assessment of the buildings is to evaluate the most possible number of the buildings over a relatively short period of time, which buildings vulnerability level would be estimated based upon and the general defects' type could be determined.

Keywords: urban vulnerability assessment, building defects, visual rapid inspection, Zanjan City

Volume 3 Issue 2 - 2017

Arash Kamali-Asl,¹ Alireza Farzampour,¹
Kiarash Nasserassadi²

¹Department of Civil Engineering, Sharif University of Technology, Iran

²Department of Civil Engineering, University of Zanjan, Iran

Correspondence: Arash Kamali-Asl, Department of Civil Engineering, 43 Lotfi Kordestani, Sepchr St, Shahrak-e-Qarb, Tehran, Tehran, Iran, Tel +1-802-8254949, Email arash.kamaliasl@gmail.com

Received: July 03, 2017 | **Published:** July 27, 2017

Introduction

The approach for rapid vulnerability assessment is based on visual inspection.¹⁻⁴ In this approach, which has been extensively used in large scale, by visual inspection of the buildings a set of parameters would be investigated, from which the buildings vulnerability level could be evaluated. Figure 1 indicates the collected data for any typical building according to FEMA P-154 (FEMA, 2015). The collected information would be enriched by supplemental data which helps to have an accurate estimation of building vulnerability level. Next, based on the statistical analysis, the sources of the residential buildings vulnerability are determined. As it is represented in Figure 1, the assigned "Basic Score" based on the type of the lateral seismic system is in-between 1 and 3.6. According to the characteristics of each building, there are either positive or negative scores added to this "Basic Score", which indicates the actual vulnerability level for any specified structure. Subsequently, the building vulnerability score is compared with the upper and lower band limits to conclude if the building is safe, or it needs any retrofit, or it is out of the normal operating conditions and should be demolished.

Based on the appendices of FEMA 154, there is a designed evaluation form to supplement the original vulnerability assessment forms of FEMA 154 which has 27 questions regarding the general assembly of the building. The questions on this form are divided into 7 general categories which would be elaborated as follows:

1. General information of the building to distinguish any building.
2. Structural information such as the type of the seismic bearing system, whether the building has been designed based on seismic codes, having the same lateral seismic resisting (SR) system in height and plan, etc.
3. Questions regarding the irregularity in buildings, specifically in

height which can significantly affect the seismic behavior of the building.

4. Consistency in transferring the lateral seismic and gravity loads which could affect the seismic behavior of the structures during the earthquakes.
5. Questions regarding the architectural considerations since they might affect the seismic behavior and structural design of the buildings.
6. The quality of the materials used in the building is one of the important factors contributing to the seismic response of the buildings; therefore, some of the questions are associated with the quality of building materials.
7. Finally, the building vulnerability level would be determined. In addition, any other considerations are noted in this last section of questions.

In this study, the mentioned vulnerability level estimation procedures could be utilized for any city in general. In order to better evaluate the seismic vulnerability of Zanjan's buildings, some of the buildings throughout the city were randomly chosen. To be consistent through the sampling, the city of Zanjan was divided into 13 regions in which each region has relatively the same economic, social, and cultural characteristics as well as relatively the same construction year. Figure 2 represents the city divided into 13 regions. Table 1 summarizes the characteristics of each region, i.e. the number of the chosen buildings, the general characteristic, and the general types of the buildings, and a rough estimate of the construction year. Randomly selected buildings in each region were evaluated regarding both the level of seismic vulnerability as well as the type of the defects. In the following section, an example of a safe building and an example of a vulnerable building are represented.

**Level 1
HIGH Seismicity**

Rapid Visual Screening of Buildings for Potential Seismic Hazards
FEMA P-154 Data Collection Form

PHOTOGRAPH

SKETCH

Address: _____ Zip: _____

Other Identifiers: _____

Building Name: _____

Use: _____

Latitude: _____ Longitude: _____

Sr: _____ Sr: _____

Screener(s): _____ Date/Time: _____

No. Stories: Above Grade: _____ Below Grade: _____ Year Built: EST

Total Floor Area (sq. ft.): _____ Code Year: _____

Additions: None Yes, Year(s) Built: _____

Occupancy: Assembly Commercial Emer. Services Historic Shelter
 Industrial Office School Government
 Utility Warehouse Residential, # Units: _____

Soil Type: A B C D E F DNK
 Hard Avg Dense Stiff Soft Poor
 Rock Rock Soil Soil Soil Soil
 #/DNK, assume Type D.

Geologic Hazards: Liquefaction: Yes/No/DNK Landslide: Yes/No/DNK Surf. Rupt: Yes/No/DNK

Adjacency: Pounding Falling Hazards from Taller Adjacent Building

Irregularities: Vertical (type/severity) _____
 Plan (type) _____

Exterior Falling Hazards: Unbraced Chimneys Heavy Cladding or Heavy Veneer
 Parapets Appendages
 Other: _____

COMMENTS: _____

Additional sketches or comments on separate page

BASIC SCORE, MODIFIERS, AND FINAL LEVEL 1 SCORE, S_{L1}																		
FEMA BUILDING TYPE	Do Not Know	W1	W1A	W2	S1 (MRF)	S2 (SF)	S3 (LM)	S4 (PC)	S5 (URM)	C1 (MRF)	C2 (URM)	C3 (URM)	PC1 (TU)	PC2	RM1 (FC)	RM2 (FC)	URM	MH
Basic Score		3.6	3.2	2.9	2.1	2.0	2.6	2.0	1.7	1.5	2.0	1.2	1.6	1.4	1.7	1.7	1.0	1.5
Severe Vertical Irregularity, $V_{1,1}$		-1.2	-1.2	-1.2	-1.0	-1.0	-1.1	-1.0	-0.8	-0.9	-1.0	-0.7	-1.0	-0.9	-0.9	-0.9	-0.7	NA
Moderate Vertical Irregularity, $V_{1,2}$		-0.7	-0.7	-0.7	-0.6	-0.6	-0.7	-0.6	-0.5	-0.5	-0.6	-0.4	-0.6	-0.5	-0.5	-0.5	-0.4	NA
Plan Irregularity, $P_{1,1}$		-1.1	-1.0	-1.0	-0.8	-0.7	-0.9	-0.7	-0.6	-0.6	-0.8	-0.5	-0.7	-0.6	-0.7	-0.7	-0.4	NA
Pre-Code		-1.1	-1.0	-0.9	-0.6	-0.6	-0.8	-0.6	-0.2	-0.4	-0.7	-0.1	-0.5	-0.3	-0.5	-0.5	0.0	-0.1
Post-Benchmark		1.6	1.9	2.2	1.4	1.4	1.1	1.9	NA	1.9	2.1	NA	2.0	2.4	2.1	2.1	NA	1.2
Soil Type A or B		0.1	0.3	0.5	0.4	0.6	0.1	0.6	0.5	0.4	0.5	0.3	0.6	0.4	0.5	0.5	0.3	0.3
Soil Type E (1-3 stories)		0.2	0.2	0.1	-0.2	-0.4	0.2	-0.1	-0.4	0.0	0.0	-0.2	-0.3	-0.1	-0.1	-0.1	-0.2	-0.4
Soil Type E (> 3 stories)		-0.3	-0.6	-0.9	-0.6	-0.6	NA	-0.6	-0.4	-0.5	-0.7	-0.3	NA	-0.4	-0.5	-0.6	-0.2	NA
Minimum Score, S_{MIN}		1.1	0.9	0.7	0.5	0.5	0.6	0.5	0.5	0.3	0.3	0.3	0.2	0.2	0.3	0.3	0.2	1.0

FINAL LEVEL 1 SCORE, $S_{L1} \geq S_{MIN}$

EXTENT OF REVIEW

Exterior: Partial All Sides Aerial

Interior: None Visible Entered

Drawings Reviewed: Yes No

Soil Type Source: _____

Geologic Hazards Source: _____

Contact Person: _____

LEVEL 2 SCREENING PERFORMED?

Yes, Final Level 2 Score, S_{L2} _____ No

Nonstructural hazards? Yes No

OTHER HAZARDS

Are There Hazards That Trigger A Detailed Structural Evaluation?

Pounding potential (unless $S_{L2} >$ cut-off, if known)

Falling hazards from taller adjacent building

Geologic hazards or Soil Type F

Significant damage/deterioration to the structural system

ACTION REQUIRED

Detailed Structural Evaluation Required?

Yes, unknown FEMA building type or other building

Yes, score less than cut-off

Yes, other hazards present

No

Detailed Nonstructural Evaluation Recommended? (check one)

Yes, nonstructural hazards identified that should be evaluated

No, nonstructural hazards exist that may require mitigation, but a detailed evaluation is not necessary

No, no nonstructural hazards identified DNK

Where information cannot be verified, screener shall note the following: EST = Estimated or unreliable data OR DNK = Do Not Know

Legend: MRF = Moment-resisting frame BR = Braced frame RU = Reinforced concrete SW = Shear wall URM = Unreinforced masonry infill LM = Light metal MH = Manufactured Housing TU = Tilt up FC = Flexible diaphragm RD = Rigid diaphragm

Figure 1 The data collection form used in this study (FEMA P-154).



Figure 2 Different regions of the city of Zanjan.

Table 1 General characteristic of the buildings and the 13 regions

Region	Year of construction	Typical buildings	General characteristics	Number of chosen buildings
1	2001-2016	RC/Steel frame	Newly-constructed, lack of some structural considerations	10
2	1991-2001	Masonry	High seismic vulnerability	12
3	2003-2016	RC/Steel frame	Newly-constructed, expectedly the safest region	10
4	1999-2008	Masonry slightly more than RC/Steel frame	Including separate towns	10
5	2001-2016	RC/Steel frame	Relatively newly-constructed, appropriate streets	10
6	1993-1998	Masonry	Some regions with Type D soil	10
7	Prior to 1993	Masonry	Irregular buildings	10
8	1998-2007	RC/Steel frame slightly more than masonry	Enhanced urban development	10
9	1999-2005	Same Masonry and RC/Steel frame	Low population density, relatively enhanced urban development	8
10	Prior to 1993	Same Masonry and RC/Steel frame	Downtown, the most populated region	10
11	1993-1999	Masonry slightly more than RC/Steel frame	The old region of the city	10
12	Prior to 1993	Masonry	Horrible urban development, very old and vulnerable buildings	10
13	1993-2001	Masonry	relatively enhanced urban development, old and vulnerable buildings	10

Case presentation

Figure 3 indicates an example of safe building located in Region 3 with a RC-frame. The building does not have any problem such as irregularity in plan or height. In addition, this building is built based on seismic codes and has a soil type C. The seismic vulnerability index for the mentioned building is 3.7 which implies the satisfactory safety of the building. The vulnerable buildings are located in all parts of the city specifically in region 12. The major issues associated with these buildings as indicated in Figures 4 & 5, are utilizing masonry material and problematic distribution of the mass leading to irregularities through the height of the buildings and causing premature fractures. The seismic reliability factor for these buildings located in region 12 of the city is approximately 0.2 which is considered low.



Figure 3 Safe building.



Figure 4 Vulnerable building with irregularities through the height of the buildings.



Figure 5 Issues in investigated buildings fracture poor material quality.

According to above-mentioned procedure, the rest of the buildings are investigated and associated information collected. The summary of the extracted data is indicated in Table 2. The average vulnerability factor for all the regions are indicated in the last column of Table 3.

Accordingly, for the regions 3 and 5, the vulnerability factor is above the average, while for the regions 2, 7 and 12 this factor is less than the average values. The statistical investigation is done to investigate the regions with least and most building issues.

Table 2 The collected information from the all regions

Region	Investigated buildings	Structures with frames	Structures without frames	Designed based on 2800 code	Same seismic resisting system in Plan	Same seismic resisting system in height	Irregularities in plan
1	10	6	4	9	2	6	4
2	12	0	12	8	0	0	2
3	10	8	2	10	6	8	0
4	10	4	6	10	3	4	3
5	10	8	2	8	3	7	2
6	10	5	5	8	2	4	2
7	10	2	8	4	2	2	1
8	10	6	4	7	1	6	1
9	8	4	4	7	3	4	3
10	10	5	5	5	4	5	2
11	10	4	6	4	3	4	0
12	10	0	10	1	0	0	2
13	10	1	9	6	2	2	1
SUM	130	53	77	87	33	52	23

Table 3 Cont'd, the collected information from the all regions

Region	Investigated buildings	Irregularities in height	Consistency in Seismic loading path	Consistency in columns locations	Opening criteria are met	Buildings with half story
1	10	8	6	6	1	0
2	12	8	2	2	8	0
3	10	3	8	8	7	0
4	10	6	5	4	5	0
5	10	1	9	8	4	1
6	10	3	5	4	3	0
7	10	5	2	2	6	0
8	10	7	7	6	3	1
9	8	5	7	7	4	2
10	10	0	5	5	5	0
11	10	0	5	5	5	0
12	10	3	2	1	9	0
13	10	2	3	3	9	0
SUM	130	51	66	52	71	4

The percentage of vulnerable buildings over the total buildings in a specified region is represented in Figure 6. Based on the field observation and the gathered information from the curves the older regions show more vulnerability. This is due to the reason that the major material used for these building is masonry. The regions 2 and 12 with 100% vulnerability are appropriate examples of regions with mostly masonry structure having significant vulnerability issues. It is noted that, in some recently-built regions such as region 1, the frame systems are used but the structure have still noticeable vulnerable issues due to the irregularities in height or plan. The least vulnerable structures are those ones having frame systems as well as no irregularities in plan or height such as region 3.

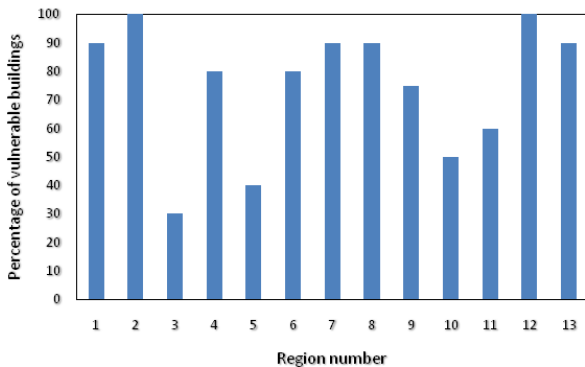


Figure 6 The percentage of vulnerable buildings over the total buildings in a specified region.

Figure 7 indicates the average vulnerability factor for different regions. If this factor is less than number 2.0, then there would be no need to have detailed assessment of the structure. Having no irregularities in plan and height of the building and having any sorts of concrete or steel frame would be highly important in increasing the vulnerability factor. However, the irregularities in seismic resisting systems are not effective in assessing the vulnerability factor. In addition, the consistency of the load path is considered as an important parameter under seismic loading conditions, which is ignored in masonry structures to some extent. Figure 8 represents the statistical investigation of the buildings in Zanjan city based on FEMA P-154. The material deficiency and the fracture in walls would make insignificant effect on vulnerability ratio factor estimation, but obviously could lead to more deterioration of the structure. The opening criteria are assumed as architectural considerations which is extensively investigated after occurrence of the events. It is noted that 75.4% of the total buildings in Zanjan city are considered vulnerable according to FEMA P-154 indicating that there is a huge need of retrofit and reconstruction Figure 8.

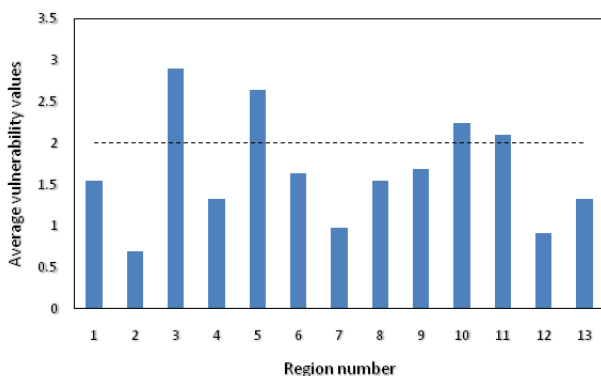


Figure 7 The Average vulnerability values.

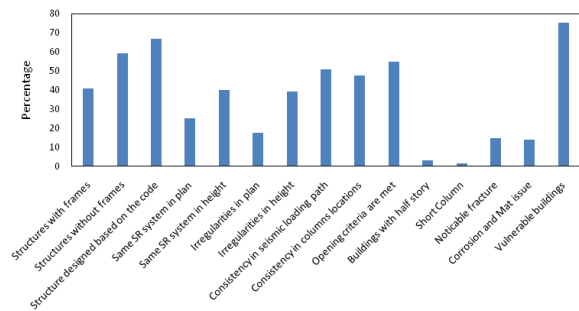


Figure 8 The collected information from the all structures.

Discussion

New procedure to evaluate the seismic reliability of the buildings are implemented to evaluate all the regions of the city. The procedure elaborated in this study could be utilized for different cities to have a quick but reliable assessment of how much building are seismic resistant. Based on the assessments of collected data, more than 80% of the regions and 75% of the constructed building are considered as vulnerable. It is worthy of notice that recently-built regions (e.g. region 1) are also evaluated as vulnerable indicating that the new methods of constructing building needs significant improvements. The major reason for such issues is due to sacrificing several criteria for having better architectural aspects; hence, the buildings are vulnerable under seismic conditions. It is worthy of mentioning that, in some newer parts of the city not only the seismic code is met but also the architectural aspects are considered; therefore, the structures are safe in overall. In general, the most significant common problem associated with the buildings are the irregularities in height of the buildings and not considering the seismic code instructions. The first problem is mostly observed in several buildings with concrete or steel frames, while the second issue is observed in masonry buildings. It is recommended not to sacrifice seismic codes and provisions for any architectural aspects, and construct the newer buildings without any irregularities in plan and height.

Acknowledgments

None.

Conflicts of interest

The author declares that there are no conflicts of interest.

Funding

None.

References

- Davey RA, Blaikie EL. Predicted and observed performance of masonry parapets in the 2007 Gisborne earthquake. Annual Conference of the New Zealand Society for Earthquake Engineering, Wellington. 2010.
- Federal Emergency Management Agency. FEMA 154: Rapid Visual Screening of Buildings for Potential Seismic Hazards: A Handbook. Washington, DC. 2015.
- Jain SK, Mitra K, Kumar M, et al. A proposed Rapid Visual Screening procedure for seismic evaluation of RC-frame buildings in India. *Earthquake Spectra*. 2010;26(3):709–729.
- Sadashiva VK, MacRae GA, Deam BL. Simple methods to evaluate structural irregularity effects. 2010 annual conference of the new zealand society for earthquake engineering wellington. 2010.